




SYLVANIA

RADIO TUBES

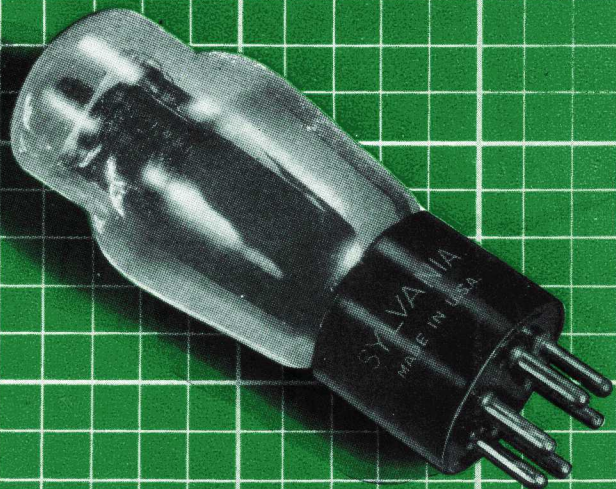

Characteristics

COMPILED BY
COMMERCIAL ENGINEERING DEPARTMENT
SYLVANIA ELECTRIC PRODUCTS, INC.

COPYRIGHT 1945

Sylvania

Radio Tube Characteristics Chart



Notice

This chart has been completely revised and many new and old types have been added to make it of more use to servicemen.

Please note that the inclusion of many of these old types does not mean that they are available from Sylvania. They are included for your reference in finding substitutes, etc. Consult our price list for types currently available.

The data published here have been compiled from various sources and while believed to be accurate, no responsibility can be assumed in case of error.

How To Use This Chart

The types are listed in numerical and alphabetical order because there are now so many types it is difficult to remember even the style of construction or whether it has a filament or cathode as emitter. The second column now lists the style of construction. Lock-In, Miniature and GT are, of course, well known, but the letters "T" and "ST" may need explaining. "T" means tubular bulb and "ST" is the dome topped bulb as now used in Type 6D6, 24, etc. The following number gives the nominal maximum diameter in eighths of inches.

New columns have been added to show the type of emitter, (cathode or filament), and for interelectrode capacitances on those types having capacitance ratings. On converters the capacitances shown are respectively, Signal Grid to Plate; R-F Input; and Mixer Output. The capacitance values shown are for a shielded tube when the data are available, since this is the latest standard method. Except in the case of obsolete (or newly announced) types, more complete technical data may be found in the Manual.

•

License Notice

Mention or reference to patented circuits does not constitute permission for their use. The license agreement under which Sylvania tubes are sold is enclosed in the tube carton.

**SYLVANIA
ELECTRIC**

EMPORIUM, PENNA.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli-watts	Type	
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgd.	Cin.	Cout.													
OA4G	ST-12	Gas Triode	4-V	Cold K						Relay Tube	Peak Cathode Ma. = 100. D-C Cathode Ma. = 25 Max. Starter Anode Drop = 60V. Approx. Anode Drop = 70V. Approx.										OA4G	
OB3/VR90-30	ST-12	Diode	4-W	Cold K						Voltage Regulator with starting Voltage at 125, Operating Volts 90, Operating Current 10 Ma. Min. 30 Ma. Max.											OB3/VR90-30	
OC3/VR105-30	ST-12	Diode	4-W	Cold K						Voltage Regulator with starting Voltage at 135, Operating Volts 105, Operating Current 5 Ma. Min. 40 Ma. Max.											OC3/VR105-30	
OD3/VR150-30	ST-12	Diode	4-W	Cold K						Voltage Regulator with starting Voltage at 180, Operating Volts 150, Operating Current 5 Ma. Min. 40 Ma. Max.											OD3/VR150-30	
OZ4	Metal	Gas Duodi.	4-R	Cold K						F-W Rect. 300 A.C. Volts Per Plate, RMS, 90 Ma. Max. 30 Ma. Min. Output Current.											OZ4	
OZ4G	T-7	Gas Duodi.	4-R	Cold K						F-W Rect. 300 A.C. Volts Per Plate, RMS, 90 Ma. Max. 30 Ma. Min. Output Current.											OZ4G	
O1A	ST-14	Triode	4-D	Filament	5.0	0.25	8.1	3.1	2.2	Amplifier	90 135	4.5 9.0		2.5 3.0		11,000 10,000	725 800	8.0 8.0			O1A	
1A3	Miniature	Diode	5-AP	Cathode	1.4	0.15				Detector	Half Wave Cathode Type Rectifier for H.F. Use										1A3	
1A4P	ST-12	Pentode	4-M	Filament	2.0	0.06	.007m	5.0	11.0	R-F Amp.	135 180	3.0 3.0	67.5 67.5	2.2 2.3	0.9 0.8	1 Meg. 1 Meg.	625 725				1A4P	
1A4T	ST-12	Tetrode	4-K	Filament	2.0	0.06	.010m	5.0	11.0	R-F Amp.	135 180	3.0 3.0	67.5 67.5	2.2 2.2	0.7 0.7	350,000 600,000	625 650				1A4T	
1A5GT	GT	Pentode	6-X	Filament	1.4	0.05				Power Amp.	85 90	4.5 4.5	85 90	3.5 4.0	0.7 0.8	300,000 300,000	800 850		25,000 25,000	100 115	1A5GT	
1A6	ST-12	Heptode	6-L	Filament	2.0	0.06	0.25	10.5	9.0	Converter	135 180	3.0 3.0	67.5 67.5	1.8 1.5	2.1 2.0	400,000 500,000	275▲ 300▲	(G2 = 135 V. □ Max. 2.0 Ma.) (G2 = 180 V. □ Max. 2.5 Ma.)			1A6	
1A7GT	GT	Heptode	7-Z	Filament	1.4	0.05	0.5m	7.0	10.0	Converter	90	0.0	45	0.55	0.60	600,000	250▲	(G2 = 90 V. Max. 1.2 Ma.)			1A7GT	
1AB5	Lock-in	Pentode	5-BF	Filament	1.2	0.13	0.25m	2.80	4.2	R-F Amp.	90 150	0 1.5	90 150	3.5 6.8	0.8 2.0	275,000 120,000	1,100 1,350				1AB5	
1B4P	ST-12	Pentode	4-M	Filament	2.0	0.06	.007m	5.0*	11.0*	R-F Amp.	135 180	3.0 3.0	67.5 67.5	1.6 1.7	0.7 0.6	1.5 Meg. ♦ 1.5 Meg. ♦	560 650				1B4P	
1B5/25S	ST-12	Duodiode-Tri.	6-M	Filament	2.0	0.06	3.6	1.6	1.9	Det. Amp.	135	3.0		0.8		35,000	575	20			1B5/25S	
1B7GT	GT	Heptode	7-Z	Filament	1.4	0.10	0.34	7.0	7.5	Converter	90	0.0	45	1.5	1.3	350,000	350▲	(G2 = 90V., 1.6 Ma.)			1B7GT	
1C5GT	GT	Pentode	6-X	Filament	1.4	0.10				Power Amp.	83 90	7.0 7.5	83 90	7.0 7.5	1.6 1.6	110,000 115,000	1,500 1,550	165 180	9,000 8,000	200 240	1C5GT	
1C6	ST-12	Heptode	6-L	Filament	2.0	0.12	0.3	10.0	10.0	Converter	135 180	3.0 3.0	67.5 67.5	1.3 1.5	2.5 2.0	600,000 700,000	300▲ 325▲	(G2 = 135 V. □ Max. 3.1 Ma.) (G2 = 180 V. □ Max. 4.0 Ma.)			1C6	
1C7G	ST-12	Heptode	7-Z	Filament	2.0	0.12	0.26	10.0	14.0	Converter	135 180	3.0 3.0	67.5 67.5	1.3 1.5	2.5 2.0	600,000 700,000	300▲ 325▲	(G2 = 135 V. □ Max. 3.1 Ma.) (G2 = 180 V. □ Max. 4.0 Ma.)			1C7G	
1D5GP	ST-12	Pentode	5-Y	Filament	2.0	0.06	.007m	5.0*	12.0*	R-F Amp.	135 180	3.0 3.0	67.5 67.5	2.2 2.3	0.9 0.8	1 Meg. 1 Meg.	625 725				1D5GP	
1D5GT	ST-12	Tetrode	5-R	Filament	2.0	0.06	.010m	4.4	10.8	R-F Amp.	135 180	3.0 3.0	67.5 67.5	2.2 2.2	0.7 0.7	350,000 600,000	625 650				1D5GT	
1D7G	ST-12	Heptode	7-Z	Filament	2.0	0.06	0.25	10.5	9.0	Converter	135 180	3.0 3.0	67.5 67.5	1.8 1.5	2.1 2.0	400,000 500,000	275▲ 300▲	(G2 = 135 V. □ Max., 2.0 Ma.) (G2 = 180 V. □ Max., 2.5 Ma.)			1D7G	
1D8GT	GT	Diode Triode Pentode	8-AJ	Filament	1.4	.100				Det. Amp.	45 67.5 90	0 0 0		0.3 0.6 1.1		77,000 55,500 43,500	325 450 575	25 25 25			1D8GT	
										Power Amp.	45 67.5 90	4.5 6.0 9.0	45 67.5 90	1.6 3.8 5.0	0.3 0.8 1.0	300,000 ♦ 200,000 ♦ 200,000 ♦	650 875 925		20,000 16,000 12,000	35 100 200		
1E4G	GT	Triode	5-S	Filament	1.4	0.05	2.4	2.4	6.0	Amplifier	90 90	0.0 3.0		4.5 1.5		11,000 17,000	1,325 825	14.5 14				1E4G
1E5GP	ST-12	Pentode	5-Y	Filament	2.0	0.06	.007m	5.5	12.0	R-F Amp.	135 180	3.0 3.0	67.5 67.5	1.6 1.7	0.7 0.6	1.5 Meg. ♦ 1.5 Meg. ♦	560 650				1E5GP	
1E7G	ST-12	Duo. Pentode	8-C	Filament	2.0	0.24				Power Amp.	135	7.5	135	7.0 ♦	2.0 ♦	220,000	1,600	350	24,000*	575	1E7G	
1F4	ST-12	Pentode	5-K	Filament	2.0	0.12				Power Amp.	135	4.5	135	8.0	2.4	200,000	1,700		16,000	310	1F4	
1F5G	ST-12	Pentode	6-X	Filament	2.0	0.12				Power Amp.	135	4.5	135	8.0	2.4	200,000	1,700		16,000	310	1F5G	
1F6	ST-12	Duodi. Pent.	6-W	Filament	2.0	0.06	.007m	4.0	9.0	R-F or I-F A-F Amp.	180 135*	1.5 2.0	67.5	2.2	0.7	1 Meg.	650				1F6	
1F7G	ST-12	Duodi. Pent.	7-AD	Filament	2.0	0.06	.01m	3.8*	9.5*	R-F or I-F A-F Amp.	180 135*	1.5 2.0	67.5	2.2	0.7	1 Meg.	650				1F7G	
1F7GV	ST-12	Duodi. Pent.	7-AD	Filament	2.0	0.60				Same as 1F7G Except Diodes One Above the Other on Negative Filament.										1F7GV		
1G4GT	GT	Triode	5-S	Filament	1.4	0.05				Amplifier	90	6.0		2.3		10,700	825	8.8			1G4GT	
1G5G	ST-14	Pentode	6-X	Filament	2.0	0.12				Power Amp.	90	6.0	90	8.5	2.5	133,000 ♦	1,500		8,500	250	1G5G	
1G6GT	GT	Duotriode	7-AB	Filament	1.4	0.10				Power Amp. Class B	90 90	0.0 0.0		1.0 1.0		45,000	675	30	(Each Triode Class A) 12,000* 675			1G6GT
1H4G	ST-12	Triode	5-S	Filament	2.0	0.06				Det. Amp.	90 135 180	4.5 9.0 13.5		2.5 3.0 3.1		11,000 10,300 10,300	850 900 900	9.3 9.3 9.3			1H4G	
1H5GT	GT	Diode Triode	5-Z	Filament	1.4	0.05	1.1	0.35	4.0	Det. Amp.	90	0.0		0.15		240,000	275	65			1H5GT	
1H6G	ST-12	Duodiode-Tri.	7-AA	Filament	2.0	0.06	3.6	1.6	1.9	Det. Amp.	135	3.0		0.8		35,000	575	20			1H6G	
1J5G	ST-14	Pentode	6-X	Filament	2.0	0.12				Power Amp.	135	16.5	135	7.0	2.0	125,000	1,000	125	13,500	575	1J5G	
1J6G	ST-12	Duotriode	7-AB	Filament	2.0	0.24				Power Amp.	Characteristics Same as Type 19.										1J6G	
1L4	Miniature	Pentode	6-AR	Filament	1.4	0.05	.008m	3.8	7.5	R-F Amp.	90 90	0 0	67.5 90	2.9 4.5	1.2 2.0	600,000 350,000	925 1,025				1L4	
1LA4	Lock-in	Pentode	5-AD	Filament	1.4	0.05				Power Amp.	85 90	4.5 4.5	85 90	3.5 4.0	0.7 0.8	300,000 300,000	800 850		25,000 25,000	100 115	1LA4	

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undis- torted Power Output Milli- watts	Type
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgp.	Cin.	Cout.												
1LA6	Lock-in	Heptode	7-AK	Filament	1.4	0.05	0.4	7.5	8.0	Converter	90	0.0	45	0.55	0.6	750,000	250▲	(G2=90 V.	Max., 1.2	Ma.)	1LA6
1LB4	Lock-in	Pentode	5-AD	Filament	1.4	0.05				Power Amp.	45 67.5 90	4.5 6.0 9.0	45 67.5 90	1.6 3.8 5.0	0.3 0.8 1.0	300,000 200,000 200,000	650 875 925		20,000 16,000 12,000	35 100 200	1LB4
1LC5	Lock-in	Pentode	7-AO	Filament	1.4	0.05	.007m	3.2	7.0	Amplifier	45 90	0.0 0.0	45 45	1.1 1.15	0.25 0.20	700,000 1.5 Meg.	750 775				1LC5
1LC6	Lock-in	Heptode	7-AK	Filament	1.4	0.05	0.28	9.0	5.5	Converter	45 90	0.0 0.0	35 35	0.7 0.75	0.75 0.7	300,000 650,000	250▲ 275▲	(G2=45 V. G2=45 V.	Max., 1.4 Max., 1.4	Ma.) Ma.)	1LC6
1LD5	Lock-in	Diode Pent.	6-AX	Filament	1.4	0.05	0.18	3.2	6.0	Amplifier	45 90	0.0 0.0	45 45	0.55 0.6	0.12 0.1	750,000 750,000	550 575				1LD5
1LE3	Lock-in	Triode	4-AA	Filament	1.4	0.05	1.7	1.7	3.0	Amplifier	90 90	0.0 3.0	 1.7	4.5 1.7		11,200 16,500	1,300 850	14.5 14.0			1LE3
1LH4	Lock-in	Diode-Triode	5-AG	Filament	1.4	0.05				Det. Amp.	90	0.0		0.15		240,000	275				1LH4
1LN5	Lock-in	Pentode	7-AO	Filament	1.4	0.05	.007m	3.4	8.0	Amplifier	90	0.0	90	1.6	0.35	1.1 Meg.	800				1LN5
1N5GT	GT	Pentode	5-Y	Filament	1.4	0.05	.007m	3.4	10.0	R-F Amp.	90	0.0	90	1.2	0.3	1.5 Meg.†	750				1N5GT
1N6G	GT	Diode Pent.	7-AM	Filament	1.4	0.05				Det. Amp.	90	4.5	90	3.4	0.7	300,000	800		25,000	100	1N6G
1P5GT	GT	Pentode	5-Y	Filament	1.4	0.05	.007m	3.0	10.0	Amplifier	90	0.0	90	2.3	0.7	800,000	750				1P5GT
1Q5GT	GT	Beam Amp.	6-AF	Filament	1.4	0.10				Power Amp.	90	4.5	90	9.5	1.3		2,200		8,000	270	1Q5GT
1R4-1294	Lock-in	H. F. Diode	4-AH	Cathode	1.4	.150				Detector	Half Wave Cathode Type Rectifier for High Frequency Use.										1R4-1294
1R5	Miniature	Heptode	7-AT	Filament	1.4	0.05	0.4m	7.0	12.0	Converter	45 90	0.0 0.0	45 67.5	0.7 1.7	1.9 3.0	600,000† 500,000†	235▲ 300▲				1R5
1S4	Miniature	Pentode	7-AV	Filament	1.4	0.1				Power Amp.	45 90	4.5 7.0	45 67.5	3.8# 7.4#	0.8# 1.4#	100,000† 100,000†	1,250 1,575		8,000 8,000	65 270	1S4
1S5	Miniature	Diode Pent.	6-AU	Filament	1.4	0.05	0.2	2.0	4.0	Det. Amp.	67.5	0.0	67.5	1.6	0.4	600,000	625				1S5
1SA6GT	GT	Pentode	6-BD	Filament	1.4	0.05	.01m	5.2	8.6	R-F Amp.	45 67.5 90	0 0 0	45 67.5 67.5	1.1 2.4 2.45	0.3 0.7 0.68	700,000 600,000 800,000	750 950 970				1SA6GT
1SB6GT	GT	Diode Pent.	6-BE	Filament	1.4	0.05	0.25	3.2	3.0	Det. Amp.	90 45	0 0	67.5 45	1.45 0.6	0.38 0.16	700,000 900,000	665 500				1SB6GT
1T4	Miniature	Pentode	6-AR	Filament	1.4	0.05	.008m	3.8	7.5	R-F Amp.	45 90	0.0 0.0	45 67.5	1.9 3.7	0.7 1.25	350,000 500,000	700 900				1T4
1T5GT	GT	Beam Amp.	6-AF	Filament	1.4	0.05	0.5	4.8	8.0	Power Amp.	90	6.0	90	6.5	1.4		1,150		14,000	170	1T5GT
1V	ST-12	Diode	4-G	Cathode	6.3	0.30				H-W Rect.	325 A. C. Volts Per Plate, RMS, 45 Ma. Output Current. Condenser Input to Filter.										1V
2A3	ST-16	Triode	4-D	Filament	2.5	2.50	16.0	7.0	5.0	Power A. p. Class AB1	250 300	45.0 62.0		60.0 40.0 Per Tube, Push Pull, Fixed Bias		800 5,250		4.2	2,500 3,000†	3,500 15,000	2A3
2A4G	ST-12	Gas Triode	5-S	Filament	2.5	2.50				Relay Tube	Instantaneous Forward or Inverse Anode Volts = 200 Peak Anode Amps. = 1.25 Average Anode Current = 0.1 Amp. Max. Averaging Time = 45 Seconds. Cold Starting Time = 2 Seconds.										2A4G
2A5	ST-14	Pentode	6-B	Cathode	2.5	1.75				Power Amp.	Characteristics Same as Type 6F6G.										2A5
2A6	ST-12	Duodiode Tri.	6-G	Cathode	2.5	0.80	1.7	1.7	3.8	Det. Amp.	250	2.0		0.9		91,000	1,100	100			2A6
2A7, 2A7S	ST-12	Heptode	7-C	Cathode	2.5	0.80	0.3m	8.5	9.0	Converter	Characteristics Same as Type 6A7.										2A7, 2A7S
2B7, 2B7S	ST-12	Duodi. Pent.	7-D	Cathode	2.5	0.80	See	Type	6B7	Det. Amp.	Characteristics Same as Type 6B7.										2B7, 2B7S
2E5	T-9	Electron Ray	6-R	Cathode	2.5	0.80				Indicator	Characteristics Same as Type 6E5.										2E5
2S/4S	ST-12	Duodiode	5-D	Cathode	2.5	1.35				Detector	The Two Diode Plates each Draw Approximately 40.0 Ma. with 50 Volts D.C. on the Plates.										2S/4S
2V3G	ST-12	Diode	4-Y	Filament	2.5	5.0				H-W Rect.	6000 A. C. Volts Per Plate, RMS, 2 Ma. Output Current. Condenser Input to Filter.										2V3G
2W3GT	GT	Diode	4-X	Filament	2.5	1.50				H-W Rect.	350 A. C. Volts Per Plate, RMS, 55 Ma. Output Current. Condenser Input to Filter.										2W3GT
2X2/879	ST-12	Diode	4-AB	Cathode	2.5	1.75				H-W Rect.	4,500 A. C. Volts Per Plate, RMS, 7.5 Ma. Output Current. Condenser Input to Filter.										2X2/879
2Z2/G84	ST-12	Diode	4-B	Filament	2.5	1.50				H-W Rect.	350 A. C. Volts Per Plate, RMS, 50 Ma. Output Current.										2Z2/G84
3A4	Miniature	Pentode	7-BB	Filament	1.4 2.8	0.20 0.10	0.35m	4.8	7.0	Amplifier	135 150	7.5 8.4	90 90	14.8 13.3	2.6 2.2	90,000 100,000	1,900 1,900		8,000 8,000	600 700	3A4
3A5	Miniature	Duotriode	7-BC	Filament	1.4 2.8	0.22 0.11	3.0	1.1	1.9	Amplifier	135 135	2.5 20.0		3.7# 30.0		8,300# 1,800#		15		 2000	3A5
3A8GT	GT	Diode Tri.-Pent.	8-AS	Filament	1.4 2.8	0.10 0.05	2.0	2.6 10.0	4.2	Tri.-Amp. Pent.-Amp.	90 90	0.0 0.0	90	0.15 1.20	0.3	240,000 600,000	275 750				3A8GT
3B5GT	GT	Beam Amp.	7-AP	Filament	1.4 2.8	0.10 0.05				Amplifier	45 67.5	4.5 7.0	45 67.5	4.4 6.7	0.3 0.5	100,000 100,000	1,400 1,500		8,000 5,000	70 180	3B5GT
3B7-1291	Lock-in	Duotriode	7-BE	Filament	2.8 1.4	.110 .220	2.6	1.4	2.6	Osc. Amp.	135 180	0 0		22.0 25.0	(Class AB2) (Class C)	1,900	20		16,000	1,500	3B7-1291
3D6-1299	Lock-in	Beam Amp.	6-BB	Filament	2.8 1.4	.110 .220	.30	7.5	6.5	Power Amp.	150 150	4.5 20.0	90 135	10.2 23.0	1.8 6.0	(Class A) (Class C)	2,400		14,000	600 1,400	3D6-1299
3LF4	Lock-in	Beam Amp.	6-BB	Filament	2.8 1.4	0.10 0.05				Power Amp.	85 90 110 90 110	5.0 4.5 6.6 4.5 6.6	85 90 110 90 110	7.0 9.5 10.0 8.0 8.5	0.8 1.3 1.4 1.0 1.1	70,000 90,000 100,000 80,000 110,000	1,950 2,200 2,200 2,000 2,000		9,000 8,000 8,000 8,000 8,000	250 270 400 230 330	3LF4
3Q4	Miniature	Pentode	7-BA	Filament	1.4 2.8	0.10 0.05				Power Amp.	85 90 90	5.0 4.5 4.5	85 90 90	6.9 9.5 7.7	1.5 2.1 1.7	120,000† 100,000† 120,000†	1,975 2,150 2,000		10,000 10,000 10,000	250 270 240	3Q4

- (1) Values are given shielded unless marked with (*).
 (2) Converter tube capacitances given are signal grid to plate;
 RF Input, Mixer Output.
- m maximum.
 *Applied through 250,000 ohms.
 †Per Tube or Section—No Signal.
- \$Plate and Target Supply Voltage.
 **Triode Operation.
 ‡Applied through 200,000 ohms.
- \$\$\$With Average Power Input of 320 Mw. Grid to Grid.
 ††Pentode Operation.
 †††For two tubes with 40 volts RMS applied to each grid.
- †Plate to Plate.
 ‡Applied through 20,000 ohms.
 †Approximate.
- ▲Conversion Conductance.
 †50 Volts RMS applied to two grids.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli- watts	Type	
	Style	Class	Basing Diag.	Type	Volts	Amps	C _{eo}	C _{in}	C _{out}													
3Q5GT	GT	Beam Amp.	7-AP	Filament	1.4 2.8	0.10 0.05				Power Amp.	90 90	4.5 4.5	90 90	9.5 8.0	1.3 1.0	75,000 80,000	2,200 2,000		8,000 8,000	270 230	3Q5GT	
3S4	Miniature	Pentode	7-BA	Filament	1.4 2.8	0.10 0.05	.30	5.0	7.0	Power Amp.	90 90	7.0 7.0	67.5 67.5	7.4 6.1	1.4 1.1	100,000 100,000	1,575 1,425		8,000 8,000	270 235	3S4	
4A6G	ST-12	Duotriode	8-L	Filament	2.0 4.0	0.12 0.06				Power Amp.	90 90	1.5 1.5		1.1 10.8		26,600 Class B. Max. Signal.	750	20	8,000	1,000	4A6G	
5T4	Metal	Duodiode	5-T	Filament	5.0	2.0				Rectifier	450 A. C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter. 550 A. C. Volts Per Plate, RMS, 225 Ma. Output Current. Choke Input to Filter.										5T4	
5U4G	ST-16	Duodiode	5-T	Filament	5.0	3.00				F-W Rect.	450 A. C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.										5U4G	
5V4G	ST-14	Duodiode	5-L	Cathode	5.0	2.00				F-W Rect.	375 A. C. Volts Per Plate, RMS, 175 Ma. Output Current. Condenser Input to Filter.										5V4G	
5W4GT	GT	Duodiode	5-T	Filament	5.0	1.50				F-W Rect.	350 A. C. Volts Per Plate, RMS, 110 Ma. Output Current. Condenser Input to Filter.										5W4GT	
5X3	ST-14	Duodiode	4-C	Filament	5.0	2.0				Rectifier	400 A. C. Volts Per Plate, RMS, 110 Ma. Output Current. Choke or Condenser Input to Filter. 1275 A. C. Volts Per Plate, RMS, 30 Ma. Output Current. Choke or Condenser Input to Filter.										5X3	
5X4G	ST-16	Duodiode	5-Q	Filament	5.0	3.00				F-W Rect.	450 A. C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.										5X4G	
5Y3GT	GT	Duodiode	5-T	Filament	5.0	2.00				F-W Rect.	350 A. C. Volts Per Plate, RMS, 125 Ma. Output Current. Condenser Input to Filter. 500 A. C. Volts Per Plate, RMS, 125 Ma. Output Current. Choke Input to Filter.										5Y3GT	
5Y4G	ST-14	Duodiode	5-Q	Filament	5.0	2.00				F-W Rect.	Characteristics Same as Type 5Y3GT.										5Y4G	
5Z3	ST-16	Duodiode	4-C	Filament	5.0	3.00				F-W Rect.	450 A. C. Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.										5Z3	
5Z4	Metal	Duodiode	5-L	Cathode	5.0	2.00				F-W Rect.	Characteristics Same as Type 5Z4GT, Except Capacitances.										5Z4	
5Z4GT	GT	Duodiode	5-L	Cathode	5.0	2.00				F-W Rect.	350 A. C. Volts Per Plate, RMS, 125 Ma. Output Current. Condenser Input to Filter.										5Z4GT	
6A3	ST-16	Triode	4-D	Filament	6.3	1.00	16.0	7.0	5.0	Power Amp.	250 325 325	45.0 68.0	 40.0#	60.0 40.0#	 (Push Pull, Fixed Bias) (Push Pull, Self Bias Resistor 850 Ohms)	800 5,250	4.2	2,500 3,000# 5,000#	3,200 15,000 10,000	6A3		
6A4/LA	ST-14	Pentode	5-B	Filament	6.3	0.30				Power Amp.	135 180	9.0 12.0	135 180	13.0 22.0	2.8 3.9	52,600 60,000	2,100 2,500	150 150	9,500 8,000	700 1,500	6A4/LA	
6A5G	ST-16	Triode	6-T	Cathode	6.3	1.25				Power Amp. P.P. AB1 Amp.	250 325	45.0 68.0		60.0 40.0 Per Tube, Push Pull, Fixed Bias	800 5,250	4.2	2,500 3,000#	3,750 15,000	6A5G			
6A6	ST-14	Duotriode	7-B	Cathode	6.3	0.80				Power Amp. Driver Driver	300 250 294	0.0 5.0 6.0		17.5 Per Plate, Class B Operation, Zero Signal 6.0 7.0	 11,300 11,000	3,100 3,200	35 35	10,000# (Class A Driver) (Class A Driver)	10,000	6A6		
6A7, 6A7S	ST-12	Heptode	7-C	Cathode	6.3	0.30	0.3	8.5	9.0	Converter	Characteristics Same as Type 6A8G, Except Capacitances.										6A7, 6A7S	
6A8	Metal	Heptode	8-A	Cathode	6.3	0.30	.06	12.0	12.0	Converter	Characteristics Same as Type 6A8G, Except Capacitances.										6A8	
6A8G GT	ST-12 GT	Heptode	8-A	Cathode	6.3	0.30	.26	9.5	12.0	Converter	100 250	1.5 3.0	50 100	1.1 3.5	1.3 2.7	600,000 360,000	360# 550#	(G ₂ = 100 V., 2.0 Ma.) (G ₂ = 250V □, Max., 4.0 Ma.)			6A8G GT	
6AB5/6N5	T-9	Electron Ray	6-R	Cathode	6.3	0.15				Indicator	135# (Series Plate Resistor 0.25 Meg., Target Current 2.0 Ma., Grid Bias = 10 for 0° Shadow.)										6AB5/6N5	
6AB7	Metal	Pentode	8-N	Cathode	6.3	0.45	.015m	8.0	5.0	Amplifier	300	3.0	200	12.5	3.2	700,000#	5,000	3,500			6AB7	
6AC5GT	T-9	Triode	6-Q	Cathode	6.3	0.40				Power Amp.	250 250 250	+13 (Bias From 76 Driver) 0.0		32.0 32.0 5.0#	 (Class A1, One Tube, Dynamic Coupled) (Class B, Two Tubes)	36,700 3,400	125	7,000 10,000#	3,700 8,000	6AC5GT		
6AC7	Metal	Pentode	8-N	Cathode	6.3	0.45	.015m	11.0	5.0	Amplifier	300		150	10.0	2.5	750,000#	9,000	6,750#	Bias Res. = 160 ohms.		6AC7	
6AD5G, GT	ST-12, GT	Triode	6-Q	Cathode	6.3	0.3	3.3*	4.1*	3.9*	Amplifier	250	2.0		0.9		66,000	1,500	100			6AD5G, GT	
6AD6G	T-9	Electron Ray	7-AG	Cathode	6.3	0.15				Indicator	100# (Ray Control Volts = 45 Approx. For 0° Shadow; Approx. = 23 Volts for 135° Shadow.) 150# (Ray Control Volts = 75 Approx. For 0° Shadow; Approx. = 50 Volts for 135° Shadow.)										6AD6G	
6AD7G	ST-14	Tri. Pentode	8-AY	Cathode	6.3	0.85				Tri.-Amp. Pent. Amp.	250 250	25.0 16.5	250	4.0 34.0	 6.5	19,000# 80,000#	325 2,500	6	7,000 3,200		6AD7G	
6AE5GT	GT	Triode	6-Q	Cathode	6.3	0.30				Amplifier	95	15		7.0		3,500	1,200	4.2			6AE5GT	
6AE6G	ST-12	Duo Plate Triode	7-AH	Cathode	6.3	0.15				Remote Cut-Off Sharp Cut-Off	250 250 250 250	1.5 35.0 1.5 9.5		6.5 0.01 4.5 0.01		2,500 1,000 3,500	1,000 950	25 33			6AE6G	
6AE7GT	GT	Duotriode	7-AX	Cathode	6.3	0.50	.25	3.0	1.8	Amplifier	250 (Driver for P.P. 6AC5GT = 250 V. 10 Ma., 6AC5GT Plate Ma. = 64. Output 9.5 Watts with 10,000 Ohms Load, Bias Developed in Circuit.)	13.5	10.0			4,650	3,000	14			6AE7GT	
6AF5G	ST-12	Triode	6-Q	Cathode	6.3	0.30				Amplifier	180	18.0		7.0		4,900	1,500	7.4			6AF5G	
6AF6G	T-9	Twin Elec. Ray	7-AG	Cathode	6.3	0.15				Indicator	100# (Ray Control Volts = Approx. 60 for 0° Shadow; Approx. Zero Volts for 100° Shadow.) 135# (Ray Control Volts = Approx. 81 for 0° Shadow; Approx. Zero Volts for 100° Shadow.)										6AF6G	
6AG5	Miniature	Pentode	7-BD	Cathode	6.3	0.30	0.25m	6.1	2.3	R-F Amp.	100 125 250		100 125 150	5.5 7.2 7.0	1.6 2.1 2.0	300,000# 500,000# 800,000#	4,750 5,100 5,000	Cathode Bias Resistor = 100 Ohms			6AG5	
6AG7	Metal	Pentode	8-Y	Cathode	6.3	0.65	.06m	13.0	7.5	Amplifier	300	10.5	300	25.0	6.5	100,000	7,700				6AG7	
6AH7GT	GT	Duotriode	8-BE	Cathode	6.3	0.30				Amplifier	Characteristics Same as Type 12AH7GT.										6AH7GT	
6AH5G	ST-16	Beam Amp.	6-AP	Cathode	6.3	0.9				Amplifier	350	18	250	54	2.5	33,000	5,200		4,200	10,800	6AH5G	
6AK5	Miniature	Pentode	7-BD	Cathode	6.3	0.175	.01	3.9	2.85	R-F Amp.	120 150 180		120 140 120	7.5 7.0 7.7	2.5 2.2 2.4	340,000 420,000 690,000	5,000 4,300 5,100	1,700 1,800 3,500	Bias Res. 200 ohms Bias Res. 330 ohms Bias Res. 200 ohms		6AK5	
6AL5	Miniature	Duodiode	6-BT	Cathode	6.3	0.30				Detector	150			9.0	High Perveance Rectifier for High Frequency Use.							6AL5
6AL6G	ST-16	Beam Amp.	6-AM	Cathode	6.3	0.9				Power Amp.	Characteristics Same as Type 6L6G										6AL6G	
6AQ6	Miniature	Duodiode-Tri.	7-BT	Cathode	6.3	0.15	1.8	1.7	1.5	Det. Amp.	100 250	1.0 3.0		0.8 1.0		61,000 58,000	1,150 1,200	70 70			6AQ6	
6B4G	ST-16	Triode	5-S	Filament	6.3	1.00	16.0	7.0	5.0	Power Amp.	Characteristics Same as Type 6A3.										6B4G	

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\text{f.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undis- torted Power Output Milli- watts	Type		
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgp.	Cin.	Cout.														
6B5	ST-14	Duotriode	6-AS	Cathode	6.3	0.80				Power Amp.	Characteristics Same as Type 6N6G.										6B5		
6B6G	ST-12	Duodiode-Tri.	7-V	Cathode	6.3	0.30	1.7	1.7	3.8	Det. Amp.	250	2.0		0.9		91,000	1,100	100			6B6G		
6B7	ST-12	Duodi. Pent.	7-D	Cathode	6.3	0.30	.007	3.5*	9.5*	R-F or i-F	100	3.0	100	5.8	1.7	300,000	950				6B7		
6B7S										Det. Amp.	180	3.0	75.0	3.4	0.9	1 Meg.	840				6B7S		
										A-F Amp.	250	3.0	100	6.0	1.5	800,000	1,000						
											250	4.5	50.0	0.65									
6B8	Metal	Duodi. Pent.	8-E	Cathode	6.3	0.30	.005m	6.0	9.0	Det. Amp.	Characteristics Same as Type 6B7, Except Capacitances.										6B8		
6B8GT 6B8G	GT,ST-12	Duodi. Pent.	8-E	Cathode	6.3	0.30	.01m	3.6	9.5	Det. Amp.	Characteristics Same as Type 6B7.										6B8GT, 6B8G		
6C4	Miniature	Triode	6-BG	Cathode	6.3	0.15	1.4	1.8	2.5	R-F Osc. R-F Amp.	300 250 100	27 8.5 0		25 10.5 11.8		 7,720 6,250	 2,200 3,100	 17 19.5	 Class C	 5,500	6C4		
6C5	Metal	Triode	6-Q	Cathode	6.3	0.30	2.0	3.0	11.0	Amplifier	Characteristics Same as Type 6C5GT, Except Capacitances.										5C5		
6C5GT	GT	Triode	6-Q	Cathode	6.3	0.30	2.2	4.8	12.0	Amplifier	250	8.0		8.0		10,000	2,000	20			6C5GT		
6C6	ST-12	Pentode	6-F	Cathode	6.3	0.30	.007m	5.0*	6.5*	Amplifier	100 250	3.0 3.0	100 100	2.0 2.0	0.5 0.5	1 Meg. 1 Meg. +	1,185 1,225				6C6		
6C7	ST-12	Duodiode-Tri.	7-G	Cathode	6.3	0.30				Det. Amp.	250	9.0		4.5		16,000	1,250	20			6C7		
6C8G	ST-12	Duotriode	8-G	Cathode	6.3	0.30	2.6 1.8	2.6 1.3	2.0 2.2	Amplifier Inverter	250 250	4.5 3.0		3.2		22,500 Plate Load 100,000 Ohms, Self-Bias Resistor 1,500 Ohms, Voltage Amplification 48. Output Volts 80, RMS, for Inverter Service.	1,600	36	(One Section)		6C8G		
6D4	Miniature	Gas Triode	5-AV	Cathode	6.3	0.25				Relay Tube	350	50	Peak Cathode Current = 100 Ma. Cathode Current = 25 Ma. Approx. Volt Drop @ 25 Ma. = 16V										6D4
6D6	ST-12	Pentode	6-F	Cathode	6.3	0.30	.007m	4.7*	6.5*	Amplifier	100 250	3.0 3.0	100 100	8.0 8.2	2.2 2.0	250,000 800,000	1,500 1,600				6D6		
6D7	ST-12	Pentode	7-H	Cathode	6.3	0.30				Amplifier	Characteristics Same as Type 6C6.										6D7		
6D8G	ST-12	Heptode	8-A	Cathode	6.3	0.15	0.2	8.0	11.0	Converter	135 250	3.0 3.0	67.5 100	1.5 3.5	1.7 2.6	600,000 400,000	325A 550A	(G ₂ = 135 V., 1.8 Ma.) (G ₂ = 250 V. □, 4.5 Ma.)			6D8G		
6E5	T-9	Electron Ray	6-R	Cathode	6.3	0.30				Indicator	100% (Series Plate Resistor 0.5 Meg. Target Current 1.0 Ma. Grid Bias = 3.3 for 90° Shadow.) 250% (Series Plate Resistor 1.0 Meg. Target Current 4.0 Ma. Grid Bias = 8.0 for 90° Shadow.)										6E5		
6E6	ST-14	Duotriode	7-B	Cathode	6.3	0.60				Power Amp. (1 Section)	180 250	20.0 27.5		11.5 18.0		4,300 3,500	1,400 1,700	6.0 6.0	15,000* 14,000*	750 1,600	6E6		
6E7	ST-12	Pentode	7-H	Cathode	6.3	0.30				Amplifier	Characteristics Same as Type 6D6.										6E7		
6F5	Metal	Triode	5-M	Cathode	6.3	0.30	2.3	5.5	4.0	Amplifier	Characteristics Same as Type 6F5GT										6F5		
6F5GT	GT	Triode	5-M	Cathode	6.3	0.30	2.8*	2.2*	3.2*	Amplifier	250	2.0		0.9		66,000	1,500	100			6F5GT		
6F6, 6F6G, 6F6GT	Metal ST-14 GT	Pentode	7-S	Cathode	6.3	0.70				Power Amp.	250 285 315 375	16.5 20.0 24.0 26.0	250 285 285 250	34.0 38.0 62.0 34.0	6.5 7.0 12.0 5.0	80,000 78,000 (Current & Output for Two Tubes) (Current & Output for Two Tubes)	2,500 2,550		7,000 7,000 10,000* 10,000*	3,200 4,800 11,000 18,000	6F6, 6F6G 6F6GT		
6F7, 6F7S	ST-12	Pent.-Triode	7-E	Cathode	6.3	0.30	.008m 2.0* 2.5*	3.2 2.5*	12.5 3.0*	Pent. Amp. Pent. Amp. Tri.-Amp.	100 250 100	3.0 3.0 3.0	100 100	6.3 6.5 3.5	1.6 1.5	290,000 850,000 16,200	1,050 1,100 525	 8.5	Pentode Section Pentode Section Triode Section (One Section)		6F7, 6F7S		
6F8G	ST-12	Duotriode	8-G	Cathode	6.3	0.60	3.8* 3.2*	3.2* 1.9*	1.0* 1.9*	Amplifier Inverter	250 250	8.0 5.5		9.0		7,700 Plate Load 50,000 Ohms Per Plate, Self Bias Resistor 1,150 Ohms, Voltage Amplification 29, Output Volts 65 RMS, for Inverter Service.	2,600	20		600 1,100	6F8G		
6G6G	ST-12	Pentode	7-S	Cathode	6.3	0.15				Power Amp.	135 180 100	6.0 9.0	135 180	11.5 15.0 4.0	2.0 2.5	170,000 175,000	2,100 2,300		12,000 10,000	600 1,100	6G6G		
6H4GT	GT	Diode	5-AF	Cathode	6.3	0.15				Rectifier	Characteristics Same as Type 6H6GT										6H4GT		
6H6	Metal	Duodiode	7-Q	Cathode	6.3	0.30				Rectifier	117 A-C Volts Per Plate, RMS, 4.0 Ma. Output Current.										6H6GT		
6H6GT	GT	Duodiode	7-Q	Cathode	6.3	0.30				Rectifier	Characteristics Same as Type 6J5GT, Except Capacitances.										6J5		
6J5	Metal	Triode	6-Q	Cathode	6.3	0.30	3.4	3.4	3.6	Amplifier	Characteristics Same as Type 6J5GT, Except Capacitances.										6J5GT		
6J5GT	GT	Triode	6-Q	Cathode	6.3	0.30	3.8	4.2	5.0	Amplifier	250	8.0		9.0		7,700	2,600	20			6J6		
6J6	Miniature	Duotriode	7-BF	Cathode	6.3	0.45	1.4 1.4	2.3 2.3	1.6 1.0	R-F Amp. # Osc. Amp.	100 150	 10		8.5 30		7,100 Push-pull Class C Operation	5,300	38	Bias Res. 50 Ohms	3,500	6J7		
6J7	Metal	Pentode	7-R	Cathode	6.3	0.30	.005m	7.0	12.0	Amplifier	Characteristics Same as Type 6J7GT, Except Capacitances.										6J7GT		
6J7GT	ST-12, GT	Pentode	7-R	Cathode	6.3	0.30	.007m	5.4	12.0	Amplifier	250	3.0	100	2.0	0.5	1.0 Meg. +	1,225				6J8G		
6J8G	ST-12	Tri.-Heptode	8-H	Cathode	6.3	0.30	.02m	4.4	10.0	Mixer Oscillator	250	3.0	100	1.3	2.9	4.0 Meg.	290A	(Heptode Section)			6H6		
6K5G	ST-12	Triode	5-U	Cathode	6.3	0.30	2.0	2.9	5.75	Amplifier	100 250	1.5 3.0		0.35 1.10		78,000 50,000	900 1,400	70 70			6K5G 6K5GT		
6K6GT	GT	Pentode	7-S	Cathode	6.3	0.40				Power Amp.	100 250 315	7.0 18.0 21.0	100 250 250	9.0 32.0 25.5	1.6 5.5 4.0	104,000 68,000 75,000	1,500 2,300 2,100		12,000 7,600 9,000	350 3,400 4,500	6K6GT		
6K7	Metal	Pentode	7-R	Cathode	6.3	0.30	.005m	7.0	12.0	Amplifier	Characteristics Same as Type 6K7G, Except Capacitances.										6K7		
6K7G	ST-12	Pentode	7-R	Cathode	6.3	0.30	.007m	5.0	12.0	Amplifier	90 180 250	3.0 3.0 3.0	90.0 75.0 100	5.4 4.0 7.0	1.3 1.0 1.7	300,000 1 Meg. 800,000	1,275 1,100 1,450				6K7G		
6K7GT	GT	Pentode	7-R	Cathode	6.3	0.30	.005m	4.6	12.0	Amplifier	Characteristics Same as Type 6K7G, Except Capacitances.										6K7GT		
6K8	Metal	Tri.-Hexode	8-K	Cathode	6.3	0.30	.03m	6.6	3.5	Mixer Osc.	Characteristics Same as Type 6K8G, Except Capacitances.										6K8		

(1) Values are

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μf .			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conduct- ance	Ampli- fication Factor	Ohms Load for Stated Power Output	Undis- torted Power Output Milli- watts	Type	
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgp.	Cin.	Cout.													
6K8G 6K8GT 6L5G	ST-12 GT	Tri.-Hexode	8-K	Cathode	6.3	0.30	.08m .08m	4.6 5.0	4.8 4.3	Mixer Oscillator	250 100	3.0 Grid Resistor	100 50,000	2.5 Plate Current 3.8 Ma.,	6.0 Mutual Conductance 3,000	600,000	350▲ (Hexode Section)	(Triode Section not Oscillating)			6K8G 6K8GT 6L5G	
6L6 6L6G 6L6GA	Metal ST-16 ST-14	Beam Amp.	7-AC	Cathode	6.3	0.90				Power Amp. P.P. A1 Amp. P.P. AB1 Amp. P.P. AB2 Amp.	250 350 270 360 360	14.0 18.0 17.5 22.5 22.5	250 250 250 270 270	72.0 54.0 134.0 88.0 88.0	5.0 2.5 11.0 5.0 5.0	22,500 33,000 23,500	6,000 5,200 5,700	 6,600* 3,800*	2,500 4,200 5,000* 6,600* 3,800*	6,500 10,800 17,500 26,500 47,000	6L6 6L6G 6L6GA	
6L7	Metal	Heptode	7-T	Cathode	6.3	0.30	.001m	7.5	11.0	Mixer Amplifier	Characteristics Same as Type 6L7G, Except Capacitances.											6L7
6L7G 6N6G	ST-12 ST-14	Heptode Duotriode	7-T 7-AU	Cathode	6.3	0.30 0.80	.005m	6.0	10.0	Mixer-Amp. Power Amp.	250 250 300 300	6.0 3.0 0.0 0.0	150 100 (Input Section) (Output Section)	3.3 5.3 8.0 45.0	9.2 6.5	1 Meg. + 600,000	350▲ 1,100	(G3 = Neg. 15 Volts) (G3 = Neg. 3.0 Volts)		7,000 4,000	6L7G 6N6G	
6N7 6N7GT	Metal GT	Duotriode Duotriode	8-B 8-B	Cathode	6.3	0.80 0.80				Amplifier Power Amp. Driver Driver	300 250 294	0.0 5.0 6.0		 6.0 7.0	 11,300 11,000	 3,100 3,200	 35 35	8,000* 10,000 (Class A Driver) (Class A Driver)		6N7 6N7GT		
6P5GT	GT	Triode	6-Q	Cathode	6.3	0.30	2.6	3.4	5.5	Amplifier Detector	250 250	13.5 20.0†		5.0 (Plate Current to be adjusted to 0.2 Ma. with no Input Signal)	9,500	1,450	13.8			6P5GT		
6P7G	ST-12	Pent.-Triode	7-U	Cathode	6.3	0.30	.007m 2.0	2.8 2.7	12.0 2.5	Amplifier	Characteristics Same as Type 6P7, Except Capacitances.											6P7G
6Q7 6Q7G 6Q7GT	Metal ST-12 GT	Duodiode-Tri. Duodiode-Tri. Duodiode-Tri.	7-V 7-V 7-V	Cathode	6.3	0.30 0.30 0.30	1.4 1.5 1.6	5.0 3.2 2.2	3.8 5.0 5.0	Det.-Amp. Det.-Amp. Amplifier	100 250 250	1.5 3.0 3.0	 100	0.35 1.1 7.0	 1.7	88,000 58,000 800,000	800 1,200 1,450	70 70 1,160		6Q7 6Q7G 6Q7GT		
6R6G 6R7 6R7GT	ST-12 Metal GT	Pentode Duodiode-Tri. Duodiode-Tri.	6-W 7-V 7-V	Cathode	6.3	0.3 0.30 0.30	.007m 2.3 2.1	4.5* 4.8 2.6	11.0* 3.8 5.2	Amplifier Det.-Amp. Det.-Amp.	250 250 250	3.0 9.0 9.0	100 9.5	7.0 9.5	1.7	8,500	1,900	16		6R6G 6R7 6R7GT/G		
6S7 6S7G	Metal ST-12	Pentode Pentode	7-R 7-R	Cathode	6.3	0.15 0.15	.005m .008m	6.5 4.4	10.5 8.0	Amplifier	135 250	3.0 3.0	67.5 100	3.7 8.5	0.9 2.0	1 Meg. 1 Meg.	1,250 1,750	375 1,100		6S7 6S7G		
6SA7 6SA7GT	Metal GT	Heptode Heptode	8-R 8-AD	Cathode	6.3	0.30 0.30	.13m .5m	9.5 11.0	12.0 11.0	Converter Converter	100 250	2.0 2.0	100 100	3.3 3.5	8.5 8.5	500,000† 1.0 Meg.†	425▲ 450▲			6SA7 6SA7GT		
6SC7 6SC7GT 6SD7GT	Metal GT GT	Duotriode Duotriode Pentode	8-S 8-S 8-N	Cathode	6.3 6.3 6.3	0.30 0.30 0.30	2.00035	2.2 9.0	3.0 7.5	Amplifier Amplifier Amplifier	250 250 100 250	2.0 2.0 2.0	 100 100	2.0 2.0 5.7 6.0	 2.0 1.9	53,000 53,000 250,000† 1.0 Meg.†	1,325 1,325 3,350 3,600	70 70	(Each Triode) (Each Triode)	6SC7 6SC7GT 6SD7GT		
6SE7GT	GT	Pentode	8-N	Cathode	6.3	0.3	.0035m	6.0	7.5	Amplifier	100 250	1.0 1.5	100 100	5.5 4.5	2.4 1.5	250,000† 1,000,000†	3,100 3,400			6SE7GT		
6SF5 6SF5GT 6SF7	Metal GT Metal	Triode Triode Diode Pent.	6-AB 6-AB 7-AZ	Cathode	6.3 6.3 6.3	0.30 0.30 0.30	2.4 2.6 .004m	4.0 4.2 5.5	3.6 3.8 6.0	Amplifier Amplifier Det.-Amp.	250 100 250	2.0 1.0 1.0	 100 100	0.9 12 12.4	 3.4 3.3	66,000 200,000† 700,000†	1,500 1,975 2,050	100		6SF5 6SF5GT 6SF7		
6SG7 6SG7GT	Metal GT	Pentode Pentode	8-BK 8-BK	Cathode	6.3 6.3	0.30 0.30	.003m .004m	8.5 8.5	7.0 7.0	R-F Amp. R-F Amp.	100 250 250	1.0 1.0 2.5	100 125 150	8.2 11.8 9.2	3.2 4.4 3.4	250,000† 900,000* 1 Meg. +	4,100 4,700 4,000			6SG7 6SG7GT		
6SH7 6SH7GT	Metal GT	Pentode Pentode	8-BK 8-BK	Cathode	6.3 6.3	0.30 0.30	.003m .004m	8.5 8.5	7.0 7.0	R-F Amp. R-F Amp.	100 250	1.0 1.0	100 150	5.3 10.8	2.1 4.1	350,000† 900,000†	4,000 4,900			6SH7 6SH7GT		
6SJ7 6SJ7GT	Metal GT	Pentode Pentode	8-N 8-N	Cathode	6.3 6.3	0.30 0.30	.005m .005m	6.0 6.3	7.0 7.5	Amplifier Amplifier	100 250	3.0 3.0	100 100	2.9 3.0	0.9 0.8	700,000† 1.5 Meg.†	1,575 1,650			6SJ7 6SJ7GT		
6SK7 6SK7GT	Metal GT	Pentode Pentode	8-N 8-N	Cathode	6.3 6.3	0.30 0.30	.003m .005m	6.0 6.5	7.0 7.5	Amplifier Amplifier	100 250	1.0 3.0	100 100	13.0 9.2	4.0 2.6	120,000† 800,000†	2,350 2,000			6SK7 6SK7GT		
6SL7GT 6SN7GT	GT GT	Duotriode Duotriode	8-BD 8-BD	Cathode	6.3 6.3	.300 .600	3.8* 4.0*	2.8* 3.0*	0.8* 1.2*	Amplifier# Amplifier (per unit)	250 90 250	2.0 0 8		2.3 10 9		44,000 6,700 7,700	1,600 3,000 2,600	70 20 20		6SL7GT 6SN7GT		
6SQ7 6SQ7GT	Metal GT	Duodiode-Tri. Duodiode-Tri.	8-Q 8-Q	Cathode	6.3 6.3	0.30 0.30	1.6 1.8	3.2 4.2	3.0 3.4	Det.-Amp. Det.-Amp.	250	2.0		0.9		91,000	1,100	100		6SQ7 6SQ7GT		
6SR7 6SR7GT 6SS7	Metal GT Metal	Duodiode-Tri. Duodiode-Tri. Pentode	8-Q 8-Q 8-N	Cathode	6.3 6.3 6.3	0.30 0.30 0.15	2.3 2.3 .004m	3.0 3.5 5.5	3.0 3.8 7.0	Det.-Amp. Det.-Amp. R-F Amp.	250 100 250	9.0 1.0 3.0	 100 100	9.5 12.2 9.0	 3.1 2.0	8,500 120,000† 1,000,000†	1,900 1,950 1,850	16		6SR7 6SR7GT 6SS7		
6ST7 6T5 6T7G	Metal ST-12 ST-12	Duodiode-Tri. Electron Ray Duodiode-Tri.	8-Q 6-R 7-V	Cathode	6.3 6.3 6.3	0.15 0.3 0.15	1.5 1.7	2.8 1.8	3.0 3.1	Det.-Amp. Indicator Det.-Amp.	250 250 100 250	9.0 1.5 3.0		9.5 0.3 1.2		8,500 95,000 62,000	1,900 680 1,050	16.0 65 65		6ST7 6T5 6T7G		

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note ⁽¹⁾ ⁽²⁾ Capacitances in $\mu\text{mf.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplifi- cation Factor	Ohms Load for Stated Power Output	Undis- torted Power Output Milli- watts	Type	
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgp.	Cin.	Cout.													
6U5/6G5	T-9	Electron Ray	6-R	Cathode	6.3	0.30				Indicator	100§ 250§	(Series Plate Resistor 0.5 Meg., Target Current 1.0 Ma., Grid Bias -8.0 for 0° Shadow.) (Series Plate Resistor 1.0 Meg., Target Current 4.0 Ma., Grid Bias -22.0 for 0° Shadow.)										6U5/6G5
6U6GT	GT	Beam Amp.	7-AC	Cathode	6.3	0.75				Power Amp.	110 200	10.5 14.0	110 135	44.0 55.0	4.0 3.0	10,000† 20,000†	5,600 6,200		2,000 3,000	2,000 5,500	6U6GT	
6U7G	ST-12	Pentode	7-R	Cathode	6.3	0.30	.007m	5.0	9.0	Amplifier	100 250	3.0 3.0	100 100	8.0 8.2	2.2 2.0	250,000 800,000	1,500 1,600				6U7G	
6V6	Metal	Beam Amp.	7-AC	Cathode	6.3	0.45	0.3	10.0	11.0	Power Amp.	Characteristics Same as Type 7C5, Except Capacitances.										6V6	
6V6GT	GT	Beam Amp.	7-AC	Cathode	6.3	0.45	0.7*	9.5*	7.5*	Power Amp.	Characteristics Same as Type 7C5.										6V6GT	
6V7G	ST-12	Duodiode-Tri.	7-V	Cathode	6.3	0.30	1.3	1.5	6.0	Det.-Amp.	135 180 250	10.5 13.5 20.0		3.7 6.0 8.0		11,000 8,500 7,500	750 975 1,100	8.3 8.3 8.3	25,000 20,000 20,000	75 160 350	6V7G	
6W5G	ST-12	Duodiode	6-S	Cathode	6.3	0.9				Rectifier	325 A-C Volts Per Plate, RMS, 90 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 90 Ma. Output Current. Choke Input to Filter.										6W5G	
6W6GT	GT	Beam Amp.	7-AC	Cathode	6.3	1.25				Power Amp.	135 250	9.0 3.0	135 100	58.0 2.0	2.8 0.5	 1.5 Meg.†	9,000 1,225	215	2,000	3,300	6W6GT	
6W7G	ST-12	Pentode	7-R	Cathode	6.3	0.15	.007m	5.0	8.5	Amplifier	Characteristics Same as Type 6X5GT/G.										6W7G	
6X5	Metal	Duodiode	6-S	Cathode	6.3	0.60				F-W Rect.	325 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Choke Input to Filter.										6X5	
6X5GT	GT	Duodiode	6-S	Cathode	6.3	0.60				F-W Rect.	5,000 A-C Volts Per Plate, RMS, 7.5 Ma. Output Current. Choke or Condenser Input to Filter. 350 A-C Volts Per Plate, RMS, 50 Ma. Output Current.										6X5GT	
6Y3G	ST-12	Diode	4-AC	Cathode	6.3	0.7				Rectifier											6Y3G	
6Y5	ST-12	Duodiode	6-J	Cathode	6.3	0.80				F-W Rect.											6Y5	
6Y6G	ST-14	Beam Amp.	7-AC	Cathode	6.3	1.25				Power Amp.	135 200 250	13.5 14.0 0.0	135 135	58.0 61.0 7.5	3.5 2.2	9,300 18,300 (Class B Operation)	7,000 7,100 (Class B Operation)		2,000 2,600 7,000*	3,600 6,000 5,500	6Y6G	
6Y7G	ST-12	Duotriode	8-B	Cathode	6.3	0.60				Power Amp.	180 250	0.0 0.0		7.5 10.5					7,000* 14,000*	5,500 8,000	6Y7G	
6Z5	ST-12	Duodiode	6-K	Cathode	6.3 12.6	0.80 0.40				F-W Rect.	230 A-C Volts Per Plate, RMS, 60 Ma. Output Current.										6Z5	
6ZY5G	ST-12	Duodiode	6-S	Cathode	6.3	0.30				F-W Rect.	325 A-C Volts Per Plate, RMS, 40 Ma. Output Current. Condenser Input to Filter.										6ZY5G	
6Z7G	ST-12	Duotriode	8-B	Cathode	6.3	0.30				Power Amp.	135 180 250	0.0 0.0 0.0		3.0 4.2		(Class B Operation) (Class B Operation)		9,000* 12,000*	2,500 4,200	6Z7G		
7A4	Lock-in	Triode	5-AC	Cathode	6.3	0.30	4.0	3.4	3.0	Amplifier	90 250	0.0 8.0		10.0 9.0		6,700 7,700	3,000 2,600	20 20			7A4	
7A5	Lock-in	Beam Amp.	6-AA	Cathode	6.3	0.75	0.44	13.0	7.2	Power Amp.	110 125	7.5 9.0	110 125	40.0 44.0	3.0 3.3	14,000 17,000	5,800 6,000		2,500 2,700	1,500 2,200	7A5	
7A6	Lock-in	Duodiode	7-AJ	Cathode	6.3	0.15				Det.-Rect.	150 A-C Volts Per Plate, RMS, 8 Ma. Output Current Per Plate.										7A6	
7A7	Lock-in	Pentode	8-V	Cathode	6.3	0.30	.005m	6.0	7.0	Amplifier	100 250	1.0 3.0	100 100	13.0 9.2	4.0 2.6	120,000† 800,000†	2,350 2,000				7A7	
7AF7	Lock-in	Duotriode	8-AC	Cathode	6.3	0.30	2.3	2.2	1.6	Amplifier (per unit)	100 100 250	0 3.0 10		10.8 5.0 9.0		6,500 8,400 7,600	2,600 1,900 2,100	17 16 16			7AF7	
7A8	Lock-in	Octode	8-U	Cathode	6.3	0.15	0.15m	7.5	9.0	Converter	100 250	3.0 3.0	75 100	1.8 3.0	2.7 3.2	650,000† 700,000†	375▲ 550▲	(G2 = 100 V., 2.8 Ma.) (G2 = 250 V. □, 4.2 Ma.)			7A8	
7B4	Lock-in	Triode	5-AC	Cathode	6.3	0.30	1.6	3.2	3.2	Amplifier	100 250	1.0 2.0		0.4 0.9		85,000 66,000	1,150 1,500	100 100			7B4	
7B5	Lock-in	Pentode	6-AE	Cathode	6.3	0.40	0.8	7.4	8.0	Power Amp.	100 250 315	7.0 18.0 21.0	100 250 250	9.0 32.0 25.5	1.6 5.5 4.0	104,000 68,000 75,000	1,500 2,300 2,100		12,000 7,600 9,000	350 3,400 4,500	7B5	
7B6	Lock-in	Duodiode-Tri.	8-W	Cathode	6.3	0.30	1.6	3.0	2.4	Det.-Amp.	100 250	1.0 2.0		0.4 0.9		110,000 91,000	900 1,100	100 100			7B6	
7B7	Lock-in	Pentode	8-V	Cathode	6.3	0.15	.007m	5.0	6.0	Amplifier	100 250	3.0 3.0	100 100	8.2 8.5	1.8 1.7	300,000 750,000	1,675 1,750				7B7	
7B8	Lock-in	Heptode	8-X	Cathode	6.3	0.30	0.2m	10.0	9.0	Converter	100 250	1.5 3.0	50 100	1.1 3.5	1.3 2.7	600,000 360,000	360▲ 550▲	(G2 = 100 V., 2.0 Ma.) (G2 = 250 V. □, 4.0 Ma.)			7B8	
7C4-1203A	Lock-in	H. F. Diode	4-AH	Cathode	6.3	0.15				Detector	Half Wave Cathode Type Rectifier for High Frequency Use.										7C4-1203A	
7C5	Lock-in	Beam Amp.	6-AA	Cathode	6.3	0.45	0.40	9.5	9.0	Power Amp. Class A	180 250 315	8.5 12.5 13.0	180 250 225	29.0 45.0 34.0	3.0 4.5 2.2	58,000 52,000 77,000	3,700 4,100 3,750		5,500 5,000 8,500	2,000 4,500 5,500	7C5	
										Class AB1	250 285	15.0 19.0	250 285	70.0 70.0	5.0 4.0	(Class AB1 Two Tubes) (Class AB1 Two Tubes)		10,000* 8,000*	10,000 14,000			
7C6	Lock-in	Duodiode-Tri.	8-W	Cathode	6.3	0.15	1.6	2.4	2.4	Det. Amp.	100 250	0.0 1.0		1.0 1.3		100,000 100,000	850 1,000	85 100			7C6	
7C7	Lock-in	Pentode	8-V	Cathode	6.3	0.15	.007m	5.5	6.5	Amplifier	100 250	3.0 3.0	100 100	1.8 2.0	0.4 0.5	1.2 Meg.† 2.0 Meg.†	1,225 1,300				7C7	
7E5-1201	Lock-in	Triode	8-BN	Cathode	6.3	0.15	1.5	3.6	2.8	Osc. Amp.	250 150	3.5 10.2		13.0 16.0		Oscillator for 750 mc Service. Oscillator-Amplifier for 300 mc Service.				200	7E5-1201	
7E6	Lock-in	Duodiode-Tri.	8-W	Cathode	6.3	0.30	1.5	3.0	2.4	Det. Amp.	250 100	9.0 3.0		9.5 3.9		8,500 11,000	1,900 1,500	16 16.5			7E6	
7E7	Lock-in	Duodi. Pent.	8-AE	Cathode	6.3	0.30	.005m	4.6	5.5	Det. Amp.	100 250	1.0 3.0	100 100	10.0 7.5	2.7 1.6	150,000† 700,000†	1,600 1,300				7E7	

(1) Values are given shielded unless marked with (*).

(2) Converter tube capacitances given are signal grid to plate;
RF Input; Mixer Output.

m maximum.

*Applied through 250,000 ohms.

†Per Tube or Section—No Signal.

§Plate and Target Supply Voltage:

**Triode Operation.

‡Applied through 200,000 ohms.

\$\$\$With Average Power input of 320 Mw. Grid to Grid.

††Pentode Operation.

†††For two tubes with 40 volts RMS applied to each grid.

†Plate to Plate.

‡Applied through 20,000 ohms.

†Approximate.

▲Conversion Conductance.

†150 Volts RMS applied to two grids.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\text{f.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undis- torted Power Output Milli- watts	Type
	Style	Class	Basing Diag.	Type	Volts	Amps	C _{sp.}	C _{in.}	C _{out.}												
7F7	Lock-in	Duotriode	8-AC	Cathode	6.3	0.30	1.6	2.4	2.0	Amplifier	100 250	1.0 2.0		0.65 2.3		62,000 Φ 44,000 Φ	1,125 1,600	70 70			7F7
7F8	Lock-in	Duotriode	8-BW	Cathode	6.3	0.30	1.2	2.8	1.4	R-F Amp. #	250			10.5			5,200	50	(Cathode Bias Resistor = 200 Ohms)		7F8
7G7/1232	Lock-in	Pentode	8-V	Cathode	6.3	0.45	.007m	9.0	7.0	Amplifier	250	2.0	100	6.0	2.0	800,000 Φ	4,500			7G7/1232	
7G8/1206	Lock-in	Duotetode	8-BV	Cathode	6.3	0.30	0.15m	3.4	2.6	R-F Amp. #	250	2.5	100	4.5	0.8	225,000	2,100			7G8/1206	
7H7	Lock-in	Pentode	8-V	Cathode	6.3	0.30	.007m	8.0	7.0	Amplifier	100 250	1.0	100 150	8.2 10.0	3.3 3.2	250,000 800,000	4,800 4,200	(Cath. Bias Resistor = 180 Ohm)			7H7
7J7	Lock-in	Tri.-Heptode	8-BL	Cathode	6.3	0.30	.03m	4.6	7.5	Hep. Mixer Tri. Osc.	100 250 100 250 $\square$	3.0 3.0 0.05 Meg. 0.05 Meg.	100 100	1.5 1.4 3.2 5.0	2.6 2.8 (Triode Grid Current 0.3 Ma.) (Triode Grid Current 0.4 Ma.)	500,000 1.5 Meg. 280 Δ 290 Δ				7J7	
7K7	Lock-in	Duodiode-Tri.	8-BF	Cathode	6.3	0.30	1.8	2.6	3.0	Det. Amp.	250	2.0		2.3		44,000	1,600	70		7K7	
7L7	Lock-in	Pentode	8-V	Cathode	6.3	0.30	.010m	8.0	6.5	Amplifier	100 250	1.0 1.5	100 100	5.5 4.5	2.4 1.5	100,000 Φ 1.0 Meg.	3,000 3,100			7L7	
7N7	Lock-in	Duotriode	8-AC	Cathode	6.3	0.60	3.0 3.0	3.4 2.9	2.0 2.4	Amplifier (per unit)	90 250	0.0 8.0		10.0 9.0		6,700 7,700	3,000 2,600	20 20		7N7	
7Q7	Lock-in	Heptode	8-AL	Cathode	6.3	0.30	0.20m	9.0	9.0	Converter	100 250	2.0 2.0	100 100	3.3 3.5	8.5 8.5	500,000 1.0 Meg.	525 Δ 550 Δ	Osc. Grid Resistor 20,000. Osc. Grid Current 0.5 Ma.			7Q7
7R7	Lock-in	Duodi. Pent.	8-AE	Cathode	6.3	0.30	.004m	5.6	5.3	Det. Amp.	100 100 250 250	2.0 1.0 2.0 1.0	100 100 100 100	3.4 5.5 3.5 6.2	1.0 2.2 1.0 1.6	500,000 Φ 350,000 Φ 1,800,000 Φ 1,000,000 Φ	2,100 3,000 2,200 3,400			7R7	
7S7	Lock-in	Tri.-Heptode	8-BL	Cathode	6.3	0.30	.03m	5.0	8.0	Hep. Mixer Tri. Osc.	100 250 100 250 $\square$	2.0 2.0 0.05 Meg. 0.05 Meg.	100 100	1.9 1.8 3.0 5.0	3.0 3.0 (Triode Grid Current 0.3 Ma.) (Triode Grid Current 0.4 Ma.)	500,000 Φ 1.25 Meg. Φ 500 Δ 525 Δ				7S7	
7T7	Lock-in	Pentode	8-V	Cathode	6.3	0.3	.005m	8.0	7.0	Amplifier	250 100	10.8 1.0	150 100	10.8 5.3	4.1 2.1	900,000 Φ 350,000 Φ	4,900 4,000			7T7	
7V7	Lock-in	Pentode	8-V	Cathode	6.3	0.45	.004m	9.5	6.5	Amplifier	300		150	10.0	3.9			(Cath. Bias Resistor = 160 Ohms)		7V7	
7W7	Lock-in	Pentode	8-BJ	Cathode	6.3	0.45	.0025m	9.5	7.0	Amplifier	Characteristics Same as Type 7V7, Except Capacitances.										7W7
7X7/XXFM	Lock-in	Duodiode-Tri.	8-BZ	Cathode	6.3	0.30				Det. Amp.	100 250	0 1.0		1.2 1.9		85,000 67,000	1,000 1,500	85 100			7X7/XXFM
7Y4	Lock-in	Duodiode	5-AB	Cathode	6.3	0.50				F-W Rect.	325 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Choke Input to Filter.										7Y4
7Z4	Lock-in	Duodiode	5-AB	Cathode	6.3	0.90				F-W Rect.	325 A-C Volts Per Plate, RMS, 100 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 100 Ma. Output Current. Choke Input to Filter.										7Z4
10	ST-16	Triode	4-D	Filament	7.5	1.25	7.0*	4.0*	3.0*	Power Amp.	250 350 425	23.5 32.0 40.0		10.0 16.0 18.0		6,000 5,150 5,000	1,330 1,550 1,600	8.0 8.0 8.0	13,000 11,000 10,200	400 900 1,600	10
12A	ST-14	Triode	4-D	Filament	5.0	0.25	8.5*	4.0*	2.0*	Det. Amp.	90 135 180	4.5 9.0 13.5		5.0 6.2 7.7		5,400 5,100 4,700	1,575 1,650 1,800	8.5 8.5 8.5	5,000 9,000 10,650	35 130 285	12A
12A5	ST-12	Pentode	7-F	Cathode	12.6 6.3	0.30 0.60	0.3	9.0	9.0	Power Amp.	100 180	15.0 25.0	100 180	17.0 45.0	3.0 8.0	50,000 Φ 35,000 Φ	1,700 2,400		4,500 3,300	800 3,400	12A5
12A6	Metal	Beam Amp.	7-AC	Cathode	12.6	0.15				Power Amp.	250	12.5	250	30	3.5	70,000	3,000		7,500	3,400	12A6
12A7	ST-12	Diode-Pent.	7-K	Cathode	12.6	0.30				Rectifier Amplifier	125 RMS 135	 13.5	 135	30.0 Max. 9.0	 2.5	 102,000	 975	 100	 13,500	 550	12A7
12A8GT	GT	Heptode	8-A	Cathode	12.6	0.15	.26	9.5	12.0	Converter	Characteristics Same as Type 6A8G.										12A8GT
12AH7GT	GT	Duotriode	8-BE	Cathode	12.6	0.15	3.0 2.2	2.8 3.2	2.6 3.0	Amplifier (per unit)	100 180	3.6 6.5		3.7 7.6		10,300 8,400	1,550 1,900	16 16			12AH7GT
12B8GT	GT	Pentode Tri.	8-T	Cathode	12.6	0.30	.015* 2.3	5.2* 5.0	9.6* 6.3	Pent.-Amp. Tri.-Amp.	100 100	3.0 1.0	100	8.0 0.6	2.0	170,000 73,000	2,100	360 110	Pentode Section Triode Section		12B8GT
12C8	Metal	Duodiode Pentode	8-E	Cathode	12.6	0.15	.005m	6.0	9.0	Det. Amp.	Characteristics Same as Type 6B8.										12C8
12F5GT	GT	Triode	5-M	Cathode	12.6	0.15	2.8*	2.2*	3.2*	Amplifier	Characteristics Same as Type 6F5GT.										12F5GT
12H6	Metal	Duodiode	7-Q	Cathode	12.6	0.15				Rectifier	Characteristics Same as Type 6H6.										12H6
12J5GT	GT	Triode	6-Q	Cathode	12.6	0.15	3.8	4.2	5.0	Amplifier	Characteristics Same as Type 6J5GT.										12J5GT
12J7GT	GT	Pentode	7-R	Cathode	12.6	0.15	.007m	5.4	12.0	Amplifier	Characteristics Same as Type 6J7G.										12J7GT
12K7GT	GT	Pentode	7-R	Cathode	12.6	0.15	.007m	5.0	12.0	Amplifier	Characteristics Same as Type 6K7G.										12K7GT
12K8	Metal	Tri.-Hexode	8-K	Cathode	12.6	0.15	0.3m	6.6	3.5	Mixer Osc.	Characteristics Same as Type 6K8GT.										12K8
12K8GT	GT	Tri.-Hexode	8-K	Cathode	12.6	0.15	.009m	5.0	4.3	Converter	Characteristics Same as Type 6K8GT.										12K8GT
12L8GT	GT	Duo. Pentode	8-BU	Cathode	12.6	0.15	0.7*	5.0*	6.0*	Power Amp.	110 180	5.5 9.0	110 180	6.1 13.0	1.3 2.8	220,000 Φ 160,000 Φ	1,680 Φ 2,150 Φ		14,000 Φ 10,000 Φ	300 Φ 1,000 Φ	12L8GT
12Q7GT	GT	Duodiode-Tri.	7-V	Cathode	12.6	0.15	1.6	2.2	5.0	Det. Amp.	Characteristics Same as Type 6Q7GT.										12Q7GT
12SA7	Metal	Heptode	8-R	Cathode	12.6	0.15	.13m	9.5	12.0	Converter	Characteristics Same as Type 6SA7.										12SA7
12SA7GT	GT	Heptode	8-AD	Cathode	12.6	0.15	.5m	11.0	11.0	Converter	Characteristics Same as Type 6SA7GT.										12SA7GT
12SC7	Metal	Duotriode	8-S	Cathode	12.6	0.15	2.0	2.2	3.0	Amplifier	Characteristics Same as Type 6SC7.										12SC7
12SF5	Metal	Triode	6-AB	Cathode	12.6	0.15	2.4	4.0	3.6	Amplifier	Characteristics Same as Type 6SF5.										12SF5
12SF5GT	GT	Triode	6-AB	Cathode	12.6	0.15	2.6	4.2	3.8	Amplifier	Characteristics Same as Type 6SF5GT.										12SF5GT

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (?) Capacitances in $\mu\mu\text{f.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milliwatts	Type		
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgp.	Cin.	Cout.														
12SF7	Metal	Diode Pent.	7-AZ	Cathode	12.6	0.15	.004m	5.5	6.0	Det. Amp.	Characteristics Same as Type 6SF7.											12SF7	
12SG7	Metal	Pentode	8-BK	Cathode	12.6	0.15	.003m	8.5	7.0	R-F Amp.	Characteristics Same as Type 6SG7.											12SG7	
12SH7	Metal	Pentode	8-BK	Cathode	12.6	0.15	.003m	8.5	7.0	R-F Amp.	Characteristics Same as Type 6SH7.											12SH7	
12SH7GT	GT	Pentode	8-BK	Cathode	12.6	0.15	.004m	8.5	7.0	R-F Amp.	Characteristics Same as Type 6SH7GT.											12SH7GT	
12SJ7	Metal	Pentode	8-N	Cathode	12.6	0.15	.005m	6.0	7.0	Amplifier	Characteristics Same as Type 6SJ7.											12SJ7	
12SJ7GT	GT	Pentode	8-N	Cathode	12.6	0.15	.005m	6.3	7.5	Amplifier	Characteristics Same as Type 6SJ7, Except Capacitances.											12SJ7GT	
12SK7	Metal	Pentode	8-N	Cathode	12.6	0.15	.003m	6.0	7.0	Amplifier	Characteristics Same as Type 6SK7.											12SK7	
12SK7GT	GT	Pentode	8-N	Cathode	12.6	0.15	.005m	6.5	7.5	Amplifier	Characteristics Same as Type 6SK7GT.											12SK7GT	
12SL7GT	GT	Duotriode	8-BD	Cathode	12.6	0.15				Amplifier	Characteristics Same as Type 6SL7GT.											12SL7GT	
12SN7GT	GT	Duotriode	8-BD	Cathode	12.6	0.30				Amplifier	Characteristics Same as Type 6SN7GT.											12SN7GT	
12SQ7	Metal	Duodiode-Tri.	8-Q	Cathode	12.6	0.15	1.6	3.2	3.0	Det. Amp.	Characteristics Same as Type 6SQ7.											12SQ7	
12SQ7GT	GT	Duodiode-Tri.	8-Q	Cathode	12.6	0.15	1.8	4.2	3.4	Det. Amp.	Characteristics Same as Type 6SQ7GT.											12SQ7GT	
12SR7	Metal	Duodiode-Tri.	8-Q	Cathode	12.6	0.15	2.3	3.0	3.0	Det. Amp.	Characteristics Same as Type 6SR7.											12SR7	
12Z3	ST-12	Diode	4-G	Cathode	12.6	0.30				H-W Rect.	235 A-C Volts Per Plate, RMS, 55 Ma. Output Current. Condenser Input to Filter.											12Z3	
14A4	Lock-in	Triode	5-AC	Cathode	12.6	0.15	4.0	3.4	3.0	Amplifier	Characteristics Same as Type 7A4.											14A4	
14A5	Lock-in	Beam Amp.	6-AA	Cathode	12.6	0.15	0.4	6.8	7.0	Power Amp.	250	12.5	250	30.0	3.5	70,000 ϕ	3,000		7,500	2,800	14A5		
14A7/12B7	Lock-in	Pentode	8-V	Cathode	12.6	0.15	.005m	6.0	7.0	Amplifier	Characteristics Same as Type 7A7.											14A7/12B7	
14AF7/XXD	Lock-in	Duotriode	8-AC	Cathode	12.6	0.15	2.3	2.2	1.6	Amplifier	Characteristics Same as Type 7AF7.											14AF7/XXD	
14B6	Lock-in	Duodiode-Tri.	8-W	Cathode	12.6	0.15	1.5	3.0	2.4	Det. Amp.	Characteristics Same as Type 7B6.											14B6	
14B8	Lock-in	Heptode	8-X	Cathode	12.6	0.15	0.2m	10.0	9.0	Converter	Characteristics Same as Type 7B8.											14B8	
14C5	Lock-in	Beam Amp.	6-AA	Cathode	12.6	0.225	0.4	9.5	9.0	Power Amp.	Characteristics Same as Type 7C5.											14C5	
14C7	Lock-in	Pentode	8-V	Cathode	12.6	0.15	.007m	6.0	6.5	Amplifier	100 250	1.0 3.0	100 100	5.7 2.2	1.8 0.7	400,000 ϕ 1.0 Meg. ϕ	2,275 1,575				14C7		
14E6	Lock-in	Duodiode-Tri.	8-W	Cathode	12.6	0.15	1.5	3.0	2.4	Det. Amp.	Characteristics Same as Type 7E6.											14E6	
14E7	Lock-in	Duodi. Pent.	8-AC	Cathode	12.6	0.15	.005m	4.6	5.5	Det. Amp.	Characteristics Same as Type 7E7.											14E7	
14F7	Lock-in	Duotriode	8-AE	Cathode	12.6	0.15	1.6 ϕ	2.4 ϕ	2.0 ϕ	Amplifier	Characteristics Same as Type 7F7.											14F7	
14H7	Lock-in	Pentode	8-V	Cathode	12.6	0.15	.007m	8.0	7.0	Amplifier	Characteristics Same as Type 7H7.											14H7	
14J7	Lock-in	Tri.-Heptode	8-BL	Cathode	12.6	0.15	0.03m	4.6	7.5	Mixer Osc.	Characteristics Same as Type 7J7.											14J7	
14N7	Lock-in	Duotriode	8-AC	Cathode	12.6	0.30		See 7N7		Amplifier	Characteristics Same as Type 7N7.											14N7	
14Q7	Lock-in	Heptode	8-AL	Cathode	12.6	0.15	0.2m	9.0	9.0	Converter	Characteristics Same as Type 7Q7.											14Q7	
14R7	Lock-in	Duodi. Pent.	8-AE	Cathode	12.6	0.15	.004m	5.6	5.3	Det. Amp.	Characteristics Same as Type 7R7.											14R7	
14S7	Lock-in	Tri. Heptode	8-BL	Cathode	12.6	0.15	.03m	5.0	8.0	Mixer Osc.	Characteristics Same as Type 7S7.											14S7	
14W7	Lock-in	Pentode	8-BJ	Cathode	12.6	0.225	.0025m	9.5	7.0	Amplifier	Characteristics Same as Type 7V7, Except Capacitances.											14W7	
14Y4	Lock-in	Duodiode	5-AB	Cathode	12.6	0.30				F-W Rect.	325 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 70 Ma. Output Current. Choke Input to Filter.											14Y4	
15	ST-12	Pentode	5-F	Cathode	2.0	0.22	.01m	2.4*	8.0*	R-F Amp.	67.5 135	1.5 1.5	67.5 67.5	1.85 1.85	0.3 0.3	630,000 800,000	710 750	450 600			15		
18	ST-14	Pentode	6-B	Cathode	14.0	0.30				Power Amp.	Characteristics Same as Type 6F6G.											18	
19	ST-12	Duotriode	6-C	Filament	2.0	0.26				Power Amp.	135 135 135	0.0 3.0 6.0		5.0 1.7 0.1		(Class B Operation) (Class B Operation) (Class B Operation)		10,000 ϕ 10,000 ϕ 10,000 ϕ	2,100 1,900 1,600		19		
20	T-8	Triode	4-D	Filament	3.3	0.132				Power Amp.	90 135	16.5 22.5		2.8 6.0		7,800 5,850	450 600	3.5 3.5	9,600 6,500	50 130		20	
22	ST-14	Tetrode	4-K	Filament	3.3	0.132	.02m	4.0*	10.0*	R-F Amp.	135	1.5	67.5	3.7	1.3	250,000	500	125			22		
24A, 24S	ST-14	Tetrode	5-E	Cathode	2.5	1.75	.007m	5.3	10.5	R-F Amp.	180 250 250*	3.0 3.0 5.0 ϕ	90 90 20 to 45	4.0 4.0 (Plate Current to be adjusted to 0.1 Ma. with no Input Signal.)	1.7 1.7	400,000 600,000	1,000 1,050	400 630			24A, 24S		
25A6	Metal	Pentode	7-S	Cathode	25.0	0.30				Power Amp.	Characteristics Same as Type 25A6GT.											25A6	
25A6GT	GT	Pentode	7-S	Cathode	25.0	0.30				Power Amp.	95 135 160	15.0 20.0 18.0	95 135 120	20.0 37.0 33.0	4.0 8.0 6.5	45,000 35,000 42,000	2,000 2,450 2,375		4,500 4,000 5,000	900 2,000 2,200		25A6GT	
25A7GT	GT	Diode Pent.	8-F	Cathode	25.0	0.30				H-W Rect.	117 A-C Volts Per Plate, RMS, 75 Ma. Output Current.											25A7GT	
25AC5GT	GT	Triode	6-Q	Cathode	25.0	0.30				Power Amp.	100	15.0	100	20.5	4.0	50,000	1,800		4,500	770		25AC5GT	
25B5	ST-12	Duotriode	6-D	Cathode	25.0	0.30				Coupled Amp.	110 165	+15 Bias from 6AE5GT/G	 46.0 Dynamic Coupled with 6AE5GT Driver	45.0		15,200	3,800	58		2,000	2,000		25B5
25B6G	ST-14	Pentode	7-S	Cathode	25.0	0.30				Power Amp.	105 200	16.0 23.0	105 135	48.0 62.0	2.0 1.8	15,500 18,000	4,800 5,000		1,700 2,500	2,400 7,100		25B6G	
25B8GT	GT	Pent.-Triode	8-T	Cathode	25.0	0.15	.02 2.2	5.5 5.0	10.0 4.6	Pent. Amp. Tri. Amp.	100 100	3.0 1.0	100	7.6 0.6	2.0	185,000 75,000	2,000 1,500	370 112.5	Pentode Section Triode Section		25B8GT		
25C6G	ST-14	Beam Amp.	7-AC	Cathode	25.0	0.30				Power Amp.	Characteristics Same as Type 6Y6G.											25C6G	
25L6	Metal	Beam Amp.	7-AC	Cathode	25.0	0.30	0.3	16.0	13.5	Power Amp.	Characteristics Same as Type 25L6GT.											25L6	
25L6GT	GT	Beam Amp.	7-AC	Cathode	25.0	0.30	0.8*	15.0*	10.0*	Power Amp.	110 200	7.5 8.0	110 110	49.0 50.0	4.0 2.0	13,000 30,000	9,000 9,500		2,000 3,000	2,100 4,300		25L6GT	

(1) Values are given shielded unless marked with (*).
(2) Converter tube capacitances given are signal grid to plate;
RF Input; Mixer Output.

*Applied through 250,000 ohms.
#Per Tube or Section—No Signal.

§Plate and Target Supply Voltage
**Triode Operation.
††Applied through 200,000 ohms.

†† For two tubes with 40 volts RMS applied to each grid.

□ Plate to Plate.
 □ Applied through 20,000 ohms.
 ♦ Approximate.

▲Conversion Conductance.
†50 Volts RMS applied to
two grids.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\text{mf.}$			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undis- torted Power Output Milli- watts	Type
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgp.	Cin.	Cout.												
25N6G	ST-12	Duotriode	7-W	Cathode	25.0	0.30				Power Amp.	110 180	0 0	110 100	45 46	7.0 5.8	Direct Coupled	2,200 2,300		2,000 4,000	2,000 3,800	25N6G
25Y5	ST-12	Duodiode	6-E	Cathode	25.0	0.30				Rect. Doubler	235 A-C Volts Per Plate, RMS, 75 Ma. Output Current Per Plate.										25Y5
25Z5	ST-12	Duodiode	6-E	Cathode	25.0	0.30				Doubler	Characteristics Same as Type 25Z6GT.										25Z5
25Z6	Metal	Duodiode	7-Q	Cathode	25.0	0.30				Rectifier	Characteristics Same as Type 25Z6GT.										25Z6
25Z6GT	GT	Duodiode	7-Q	Cathode	25.0	0.30				Doubler H-W Rect.	117 A-C Volts Per Plate, RMS, 75 Ma. Output Current Per Plate. 235 A-C Volts, RMS, 75 Ma. Output Current Per Plate.										25Z6GT
26	ST-14	Triode	4-D	Filament	1.5	1.05	8.1*	2.8*	2.5*	Amplifier	90 135 180	7.0 10.0 14.5		2.9 5.5 6.2		8,900 7,600 7,300	935 1,100 1,150	8.3 8.3 8.3			26
26A7GT	GT	Duo. Beam Amplifier	8-BU	Cathode	26.5	0.6	1.2*	16.0*	13.0*	Power Amp.	26.5	4.5	26.5	20.0#	2.0#	2,500#	5,500#		1,500#	200#	26A7GT
27, 27S	ST-12	Triode	5-A	Cathode	2.5	1.75	3.3*	3.2*	2.3*	Amplifier	90 135 180 250	6.0 9.0 13.5 21.0		3.0 4.7 5.0 5.2		10,000 9,000 9,000 9,250	900 1,000 1,000 975	9.0 9.0 9.0 9.0			27, 27S
										Detector	250	30.0#									
											(Plate Current to be adjusted to 0.2 Ma. with no Input Signal.)										
28D7	Lock-in	Duo. Beam Amplifier	8-BS	Cathode	28.0	0.40				Amplifier (per section) P.P.A. Total	28 28 28	 3.5 0	28 28 28	9.0 12.5 64.0	0.7 1.0 4.0	 4,200	 3,400		4,000 4,000 1500#	80 100 600	28D7
28Z5	Lock-in	Double Diode	6-BJ	Cathode	28.0	0.24				F-W Rect.	325 A-C Volts Per Plate, RMS, 100 Ma. Output Current. Condenser Input to Filter. 450 A-C Volts Per Plate, RMS, 100 Ma. Output Current. Choke Input to Filter.										28Z5
30	ST-12	Triode	4-D	Filament	2.0	0.06	6.0*	3.0*	2.1*	Det. Amp.	90 135 180	4.5 9.0 13.5		2.5 3.0 3.1		11,000 10,300 10,300	850 900 900	9.3 9.3 9.3			30
31	ST-12	Triode	4-D	Filament	2.0	0.13				Power Amp.	135 180	22.5 30.0		8.0 12.3		4,100 3,600	925 1,050	3.8 3.8	7,000 5,700	185 375	31
32	ST-14	Tetrode	4-K	Filament	2.0	0.06	.015m	5.3*	10.5*	R-F Amp.	135 180	3.0 3.0	67.5 67.5	1.7 1.7	0.4 0.4	950,000 1.2 Meg.	640 650	610 780			32
										Detector	180	6.0#	67.5								
											(Plate Current to be adjusted to 0.2 Ma. with no Input Signal.)										
32L7GT	GT	Diode-Beam Amplifier	8-Z	Cathode	32.5	0.30				Rectifier Power Amp.	125 RMS 110	7.5	110	60 40	3.0	15,000	6,000	81	2,600	1,000	32L7GT
33	ST-14	Pentode	5-K	Filament	2.0	0.26	1.0*	8.0*	12.0*	Power Amp.	135 180	13.5 18.0	135 180	14.5 22.0	3.0 5.0	50,000 55,000	1,450 1,700	70 90	7,000 6,000	700 1,400	33
34	ST-14	Pentode	4-M	Filament	2.0	0.06	.015m	6.0*	11.0*	R-F Amp.	67.5 135 180	3.0 3.0 3.0	67.5 67.5 67.5	2.7 2.8 2.8	1.1 1.0 1.0	400,000 600,000 1 Meg.	560 600 620	224 360 620			34
35/51, 35S/51S	ST-14	Tetrode	5-E	Cathode	2.5	1.75	.007m	5.3*	10.5*	R-F Amp.	180 250 250*	3.0 3.0 1.0	90.0 90.0 45 to 67.5	6.3 6.5 0.5	2.5 2.5	300,000 400,000 2 Meg.	1,020 1,050	305 420			35/51, 35S/51S
35A5	Lock-in	Beam Amp.	6-AA	Cathode	35.0	0.15				A-F Amp.	110 200	7.5 8.0	110 110	40.0 41.0	3.0 2.0	14,000# 40,000#	5,800 5,900		2,500 4,500	1,500 3,300	35A5
35L6GT	GT	Beam Amp.	7-AC	Cathode	35.0	0.15	0.8*	13.0*	9.5*	Power Amp.	110 200	7.5 8.0	110 110	40.0 41.0	3.0 2.0	14,000# 40,000#	5,800 5,900		2,500 4,500	1,500 3,300	35L6GT
35Y4	Lock-in	Diode	5-AL	Cathode	35.0	0.15				H-W Rect.	235 Max. A-C Volts, RMS, 60 Ma. Output Current with Panel Lamp. 235 Max. A-C Volts, RMS, 100 Ma. Output Current without Panel Lamp.										35Y4
35Z3	Lock-in	Diode	4-Z	Cathode	35.0	0.15				H-W Rect.	235 Max. A-C Volts Per Plate, RMS, 100 Ma. Output Current, Condenser Input to Filter.										35Z3
35Z4GT	GT	Diode	5-AA	Cathode	35.0	0.15				H-W Rect.	117 A-C Volts, RMS, 100 Ma. Output Current. Condenser Input to Filter.										35Z4GT
35Z5GT	GT	Diode	6-AD	Cathode	35.0	0.15				H-W Rect.	Characteristics Same as Type 40Z5/45Z5GT.										35Z5GT
35Z6G	ST-14	Duodiode	7-Q	Cathode	35.0	0.30				Doubler H-W Rect.	117 A-C Volts Per Plate, RMS, 110 Ma. Output Current. 235 A-C Volts Per Plate, RMS, 110 Ma. Output Current.										35Z6G
36	ST-12	Tetrode	5-E	Cathode	6.3	0.30	.007m	3.7*	9.2*	R-F Amp.	135 180 250	1.5 3.0 3.0	67.5 90.0 90.0	2.8 3.1 3.2	Not Over 1/2 of Plate Ma.	575,000 500,000 550,000	1,000 1,050 1,080	475 525 595			36
										Detector	250	6.0#	20 to 25								
											(Plate Current to be adjusted to 0.1 Ma. with no Input Signal.)										
37	ST-12	Triode	5-A	Cathode	6.3	0.30	2.0*	3.5*	2.9*	Amplifier	135 180 250	9.0 13.5 18.0		4.1 4.3 7.5		10,000 10,200 8,400	925 900 1,100	9.2 9.2 9.2			37
38	ST-12	Pentode	5-F	Cathode	6.3	0.30	0.3*	3.5*	7.5*	Power Amp.	135 180 250	13.5 18.0 25.0	135 180 250	9.0 14.0 22.0	1.5 2.4 3.8	130,000 110,000 100,000	925 1,050 1,200	120 120 120	13,500 11,600 10,000	550 1,000 2,500	38
39/44	ST-12	Pentode	5-F	Cathode	6.3	0.30	.007m	3.5*	10.0*	R-F Amp.	90 180 250	3.0 3.0 3.0	90.0 90.0 90.0	5.6 5.8 5.8	1.6 1.4 1.4	375,000 750,000 1 Meg.	960 1,000 1,050	360 750 1,050			39/44
										A-F Amp.	250*	1.0	67.5	0.5		2 Meg.					
40	ST-14	Triode	4-D	Filament	5.0	0.25	8.0	2.8	2.2	Amplifier	135 180	1.5 3.0		0.2 0.2		150,000 150,000	200 200	30 30			40
40Z5/45Z5GT	GT	Diode	6-AD	Cathode	45.0	0.15				H-W Rect.	117 A-C Volts, RMS, 100 Ma. Output Current without Panel Lamp Connected, or 60 Ma. with Panel Lamp.										40Z5/45Z5GT
41	ST-12	Pentode	6-B	Cathode	6.3	0.40				Power Amp.	Characteristics Same as Type 6K6GT.										41
42	ST-14	Pentode	6-B	Cathode	6.3	0.65				Power Amp.	Characteristics Same as Type 6F6G.										42
43	ST-14	Pentode	6-B	Cathode	25.0	0.30				Power Amp.	Characteristics Same as Type 25A6GT.										43

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in $\mu\mu\text{f}$.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli- watts	Type
	Style	Class	Basing Diag.	Type	Volts	Amps	Cgp.	Cin.	Cout.												
45	ST-14	Triode	4-D	Filament	2.5	1.50	7.0*	4.0*	3.0*	Power Amp.	180 250 275	31.5 50.0 56.0		31.0 34.0 36.0		1,650 1,610 1,700	2,125 2,175 2,050	3.5 3.5 3.5	2,700 3,900 4,600	830 1,600 2,000	45
45Z3	Miniature	Diode	5-AM	Cathode	45.0	0.075				H-W Rect.	117 A-C Volts Per Plate, RMS, 65 Ma. Output Current.										45Z3
46		Dual Grid Triode	5-C	Filament	2.5	1.75				Power Amp.	250 300 400	33.0 0.0 0.0	Tie Gs to P Tie Gs to G Tie Gs to G	22.0 4.0 6.0		2,380 (Class B Operation) 2,350 (Class B Operation)	5.6	6,400 5,200* 5,800*	1,250 16,000 20,000	46	
47	ST-16	Pentode	5-B	Filament	2.5	1.75	1.2*	8.6*	1.3*	Power Amp.	250	16.5	250	31.0	6.0	60,000	2,500	150	7,000	2,700	47
48	ST-16	Tetrode	6-A	Cathode	30.0	0.40				Power Amp.	95 125	20.0 22.5	95.0 100	52.0 52.0	12.0 12.0	4,000 11,000	3,900 3,900	15.6 43	1,500 1,500	2,000 3,000	48
49	ST-14	Dual Grid Triode	5-C	Filament	2.0	0.12				Power Amp.	135 180	20.0 0.0	Tie Gs to P Tie Gs to G	6.0 2.0		4,175 (Two Tubes Class B Operation)	1,125	4.7	11,000 12,000*	170 3,500	49
50	ST-16	Triode	4-D	Filament	7.5	1.25	7.1*	4.2*	3.4*	Power Amp.	300 350 400 450	54.0 63.0 70.0 84.0		35.0 45.0 55.0 55.0		2,000 1,900 1,800 1,800	1,900 2,000 2,100 2,100	3.8 3.8 3.8 3.8	4,600 4,100 3,670 4,350	1,600 2,400 3,400 4,600	50
50A5	Lock-in	Beam Amp.	6-AA	Cathode	50.0	0.15				Power Amp.	110 200	7.5 8.0	110 110	49.0 50.0	4.0 1.5	10,000* 35,000*	8,200 8,250		2,000 3,000	2,100 4,300	50A5
50C6G	ST-14	Beam Amp.	7-AC	Cathode	50.0	0.15				Power Amp.	Characteristics Same as Type 6Y6G.										50C6G
50L6GT	GT	Beam Amp.	7-AC	Cathode	50.0	0.15				Power Amp.	Characteristics Same as Type 25L6GT.										50L6GT
50Y6GT	GT	Duodiode	7-Q	Cathode	50.0	0.15				F-W Rect.	Characteristics Same as Type 25Z6GT.										50Y6GT
50Z7G	ST-12	Duodiode	8-AN	Cathode	50.0	0.15				Doubler H-W Rect.	117 A-C Volts Per Plate, RMS, 65 Ma. Output Current Per Plate. With Current passing thru Panel Lamp Section. 235 A-C Volts, RMS, 65 Ma. Output Current.										50Z7G
52	ST-14	Dual Grid Triode	5-C	Filament	6.3	0.30				Class A Amplifier Class B	110 180	0 0	43 1.5	G ₂ to P G ₁ to G ₂	 Two Tubes in P.P.	1,750	3,000	5.2	2,000* 10,000*	1,500 5,000	52
53	ST-14	Duotriode	7-B	Cathode	2.5	2.0				Power Amp.	Characteristics Same as Type 6A6.										53
55, 55S	ST-12	Duodiode-Tri.	6-G	Cathode	2.5	1.0	1.5*	1.5*	4.3*	Det. Amp.	Characteristics Same as Type 6V7G.										55, 55S
56, 56S	ST-12	Triode	5-A	Cathode	2.5	1.0	2.8*	3.5*	2.5*	Amplifier Detector	250 250	13.5 20.0		5.0	 (Plate Current to be adjusted to 0.2 Ma. with no Input Signal)	9,500	1,450	13.8			56, 56S
56AS	ST-12	Triode	5-A	Cathode	6.3	0.40				Amplifier	Characteristics Same as Type 56.										56AS
57, 57S	ST-12	Pentode	6-F	Cathode	2.5	1.00	.007m	5.0*	6.5*	Amplifier Detector	100 250 250*	3.0 3.0 4.3	100 100 100	2.0 2.0	0.5 0.5 (Plate Current to be adjusted to 0.1 Ma. with no Input Signal)	1 Meg. 1 Meg. +	1,185 1,225			57, 57S	
57AS	ST-12	Pentode	6-F	Cathode	6.3	0.40				Amplifier	Characteristics Same as Type 57.										57AS
58, 58S	ST-12	Pentode	6-F	Cathode	2.5	1.00	.007m	4.7*	6.0*	Amplifier	100 250	3.0 3.0	100 100	8.0 8.2	2.2 2.0	250,000 800,000	1,500 1,600			58, 58S	
58AS	ST-12	Pentode	6-F	Cathode	6.3	0.40				Amplifier	Characteristics Same as Type 58.										58AS
59	ST-16	Pentode	7-A	Cathode	2.5	2.0				Power Amp.	250** 250† 300** 400**	28.0 18.0 0.0 0.0	Tie Gs to P Tie Gs to G and Su to P	26.0 35.0 20.0 26.0		2,300 40,000 (Class B Operation Two Tubes) (Class B Operation Two Tubes)	2,600 2,500 100	6.0	5,000 6,000 4,600* 6,000*	1,250 3,000 15,000† 20,000†	59
70A7GT	GT	Diode-Beam Amplifier	8-AB	Cathode	70.0	0.15				H-W Rect. Power Amp.	125 110	A-C Volts Per Plate, RMS, 60 Ma. Output Current. 7.5	 110	 40	 3		5,800		2,500 1,500		70A7GT
70L7GT	GT	Diode-Beam Amplifier	8-AA	Cathode	70.0	0.15				Rectifier Amplifier	117 110	A-C Volts, RMS, 70 Ma. Output Current. 7.5	 110	 40	 3.0	 15,000	7,500		2,000 1,800		70L7GT
71A	ST-14	Triode	4-D	Filament	5.0	0.25	7.5*	3.2*	2.9*	Power Amp.	90 135 180	16.5 27.0 40.5		10.0 17.3 20.0		2,170 1,820 1,750	1,400 1,650 1,700	3.0 3.0 3.0	3,000 3,000 4,800	125 400 790	71A
75, 75S	ST-12	Duodiode-Tri.	6-G	Cathode	6.3	0.30	1.7*	1.7*	3.8*	Det. Amp.	250	2.0		0.9		91,000	1,100	100		75, 75S	
76	ST-12	Triode	5-A	Cathode	6.3	0.30	2.8*	3.5*	2.5*	Amplifier Detector	250 250	13.5 20.0		5.0	 (Plate Current to be adjusted to 0.2 Ma. with no Input Signal)	9,500	1,450	13.8		76	
77	ST-12	Pentode	6-F	Cathode	6.3	0.30	.007m	4.7*	11.0*	Amplifier	100 250	1.5 3.0	60.0 100	1.7 2.3	0.4 0.5	600,000* 1.0 Meg. +	1,100 1,250			77	
78	ST-12	Pentode	6-F	Cathode	6.2	0.30	.007m	4.5*	11.0*	Amplifier	90 180 250	3.0 3.0 3.0	90.0 75.0 100	5.4 4.0 7.0	1.3 1.0 1.7	300,000* 1 Meg. + 800,000*	1,275 1,100 1,450			78	
79	ST-12	Duotriode	6-H	Cathode	6.3	0.60				Power Amp.	180 250	0.0 0.0	 10.5	7.5	 (Class B Operation) (Class B Operation)			7,000* 14,000*	5,500 8,000	79	
80	ST-14	Duodiode	4-C	Filament	5.0	2.00				F-W Rect.	350 A-C Volts Per Plate, RMS, 125 Ma. Output Current. Condenser Input to Filter. 500 A-C Volts Per Plate, RMS, 125 Ma. Output Current. Choke Input to Filter.										80
81	ST-16	Diode	4-B	Filament	7.5	1.25				H-W Rect.	700 A-C Volts Per Plate, RMS, 85 Ma. Output Current. Condenser Input to Filter.										81
82	ST-14	Duodiode	4-C	Filament	2.5	3.0				F-W Rect.	450 A-C Volts Per Plate, RMS, 115 Ma. Output Current. Condenser Input to Filter.										82
83	ST-16	Duodiode	4-C	Filament	5.0	3.00				F-W Rect.	450 A-C Volts Per Plate, RMS, 225 Ma. Output Current. Condenser Input to Filter.										83
83V	ST-14	Duodiode	4-AD	Cathode	5.0	2.00				F-W Rect.	375 A-C Volts Per Plate, RMS, 175 Ma. Output Current. Condenser Input to Filter.										83V
84/6Z4	ST-12	Duodiode	5-D	Cathode	6.3	0.50				F-W Rect.	325 A-C Volts Per Plate, RMS, 60 Ma. Output Current. Condenser Input to Filter.										84/6Z4
85	ST-12	Duodiode-Tri.	6-G	Cathode	6.3	0.30	1.5*	1.5*	4.3*	Det. Amp.	Characteristics Same as Type 6V7G.										85
85AS	ST-12	Duodiode-Tri.	6-G	Cathode	6.3	0.30				Det. Amp.	250	9.0		4.5		16,000	1,250	20		85AS	

(1) Values are given shielded unless marked with (*).
(2) Converter tube capacitances given are signal grid to plate;
RF Input; Mixer Output.

m maximum.

*Applied through 250,000 ohms.

†Per Tube or Section—No Signal.

§Plate and Target Supply Voltage.

**Triode Operation.

††Applied through 200,000 ohms.

§§With Average Power input of 320 Mw. Grid to Grid.

‡Pentode Operation.

†††For two tubes with 40 volts RMS applied to each grid.

*Plate to Plate.

□ Applied through 20,000 ohms.

♦Approximate.

▲Conversion Conductance.

†50 Volts RMS applied to

two grids.

SYLVANIA TUBES — AVERAGE CHARACTERISTICS

Type	Construction			Emitter			Note (1) (2) Capacitances in μ f.			Use	Plate Volts	Negative Grid Volts	Screen Volts	Plate Current Ma.	Screen Current Ma.	Plate Resistance Ohms	Micromhos Mutual Conductance	Amplification Factor	Ohms Load for Stated Power Output	Undistorted Power Output Milli- watts	Type	
	Style	Class	Basing Diag.	Type	Volts	Amps	Cop.	Cin.	Cout.													
89	ST-12	Pentode	6-F	Cathode	6.3	0.40				Power Amp.	160** 180† 180	20.0 18.0 0.0	Gs&Su to P 180	17.0 20.0 3.0#		3,300 80,000	1,425 1,550	4.7 125	7,000 8,000 9,400†	300 1,500 3,500	89	
VR-90-105-150				Cold						Now Listed as OB3, OC3 and OD3.											VR-90-105-150	
V-99	T-8	Triode	4-E	Filament	3.3	0.063	3.5*	2.5*	2.2*	Det. Amp.	90	4.5		2.5		15,500	425	6.6			V99	
X99	T-9	Triode	4-D	Filament	3.3	0.063	3.5*	2.5*	2.2*	Det. Amp.	90	4.5		2.5		15,500	425	6.6			X99	
117L7/M7GT	GT	Diode-Beam Amplifier	8-AO	Cathode	117	0.09				H-W Rect. Power Amp.	117 A-C Volts, RMS, 75 Ma. Output Current.	105 5.2 105	43	4.0	Condenser Input to Filter.	17,000†	5,300		4,000	850	117L7/M7GT	
117N7Gf	GT	Diode-Beam Amplifier	8-AV	Cathode	117	0.09				H-W Rect. Power Amp.	117 A-C Volts, RMS, 75 Ma. Output Current.	100 6.0 100	51	5.0	Condenser Input to Filter.	16,000†	7,000		3,000	1,200	117N7Gf	
117P7GT	GI	Diode-Beam Amplifier	8-AV	Cathode	117	0.09				H-W Rect. Power Amp.	117 A-C Volts Per Plate, RMS, 75 Ma. Output Current.	105 5.2 105	43	4		17,000	5,300		4,000	850	117P7GT	
117Z4GT	GT	Diode	5-AA	Cathode	117	0.04				H-W Rect.	117 A-C Volts Per Plate, RMS, 90 Ma. Output Current.										117Z4GT	
117Z6GT	GI	Duodiode	7-Q	Cathode	117	0.075				Doubler	117 A-C Volts Per Plate, RMS, 60 Ma. Output Current Per Plate.										117Z6GT	
182B/482B	SI-14	Triode	4-D	Filament	5.0	1.25				Power Amp.	250	35.0		20.0		2,500	2,000	5.0	4,500	1,350	182B/482B	
183/483	ST-14	Triode	4-D	Filament	5.0	1.25				Power Amp.	250	65.0		20.0		2,000	1,500	3.0	4,500	1,800	183/483	
210-T	ST-16	Triode	4-D	Filament	7.5	1.25	7.0*	4.0*	3.0*	Power Amp.	(Standard Type 10 with Ceramic Base, See Type 10 Characteristics)											210-T
485	ST-12	Triode	5-A	Cathode	3.0	1.25				Det. Amp.	180	9.0		5.8		8,900	1,400	12.5			485	
864	T-9	Triode	4-D	Filament	1.1	0.25	5.3*	3.3*	2.1*	Det. Amp.	90 4.5 135 9.0			2.9 3.5		13,500 12,700	610 645	8.2 8.2			864	
884	ST-12	Gas Triode	6-Q	Cathode	6.3	0.6	6.0*	2.0*	0.6*	Relay Tube	300	30		75	For Relay Operation Limit Time to 30 Secs. 300 Ma. Peak Current. 16 Volt Tube Drop					884		
885	ST-12	Gas Triode	5-A	Cathode	2.5	1.5	6.0*	2.0*	0.6*	Relay Tube	Characteristics Same as Type 884.											885
950	ST-14	Pentode	5-K	Filament	2.0	0.12				Power Amp.	135 16.5 135		7.0	2.0		125,000	1,000	125	13,500	575	950	
1204	Lock-in	Pentode		Cathode	6.3	0.15	.06m	3.5	4.0	Amplifier	250 2.0 100		4.0	1.3		500,000	1,800				1204	
1221	ST-12	Pentode	6-F	Cathode	6.3	0.30				Amplifier	Special Non-Microphonic Tube, Characteristics Same as Type 6C6.											1221
1223	ST-12	Pentode	7-R	Cathode	6.3	0.30				Amplifier	"G" Equivalent of Type 1221 Above.											1223
1229	ST-12	Tetrode	4-K	Filament	2.0	0.06					Special Type 32. Made for Low Grid Current Applications.											1229
1231	Lock-in	Pentode	8-V	Cathode	6.3	0.45	.015m	8.5	6.5	Pent. Amp. Tet. Amp.	300 300		150 150	10.0 12.0	2.5 0.5	700,000 540,000	5,500 6,500	3,850 3,500	Bias Res. = 200 Ohms Bias Res. = 200 Ohms		1231	
1266	GT	Diode	4-W Exc. Jumper	Cold K						Regulator	Voltage Regulator Similar to Type OB3/VR-90-30, Except Regulating at 70 Volts.											1266
1267	GT	Gas Triode	4-V	Cold K						Relay Tube	Similar to Type OA4G.											1267
1275	ST-16	Duodiode	4-C	Filament	5.0	1.75				Rectifier	Similar to Type 5Z3.											1275
1276	ST-16	Triode	4-D	Filament	4.5	1.14				Amplifier	Similar to Type 6A3.											1276
1293	Lock-in	Triode	4-AA	Filament	1.4	.11	1.7	1.7	3.0	Oscillator	90 0 90 20		5.2 13.25			1,500	15				1293	
1612	Metal	Heptode	7-T	Cathode	6.3	0.30	.001m	7.5	11.0	Mixer Amp.	Characteristics Same as Type 6L7.											1612
1626	ST-12	Triode	6-Q	Cathode	12.6	.25	4.4*	3.2*	3.4	Oscillator	250 70			25	Class C. Oscillator or Amplifier.					1626		
1629	GI	Electron Ray	7-AL	Cathode	12.6	0.15				Indicator	Characteristics Same as Type 6E5.											1629
2050	ST-12	Gas Tetrode	8-BA	Cathode	6.3	0.60	0.26*	4.2*	3.6*	Relay Tube	400 5.0 0 220 4.0 0		100 75		For Relay Operation Limit Time to 30 Secs. 1 Amp. Peak Current. 8 Volts Tube Drop.					2050		
2051	ST-12	Gas Tetrode	8-BA	Cathode	6.3	0.6	0.26*	4.2*	3.6*	Relay Tube	220 4.0 0		75		For Relay Operation Limit Time to 30 Secs. 375 Ma. Peak Current, 8 Volts Tube Drop.					2051		
XXD										Now listed as 14AF7/XXD												
XXL	Lock-in	Triode	5-AC	Cathode	6.3	0.30				Amplifier	100 250	0.0 8.0		10.0 8.0		7,000 8,700	3,600 2,300	25 20			XXL	

(1) Values are given shielded unless marked with (*).

(2) Converter tube capacitances given are signal grid to plate;
RF Input; Mixer Output.

m maximum.

*Applied through 250,000 ohms.
†Per Tube or Section—No Signal.

§Plate and Target Supply Voltage.

**Triode Operation.

‡Applied through 200,000 ohms.

§§With Average Power input of 320 Mw. Grid to Grid.

†Pentode Operation.

††For two tubes with 40 volts RMS applied to each grid

‡Plate to Plate.


□ Applied through 20,000 ohms.

‡Approximate.

▲Conversion Conductance.


†50 Volts RMS applied to
two grids.

TUBE AND BASE DIAGRAMS (VIEWED FROM BOTTOM OF BASE— RMA NUMBERING SYSTEM)

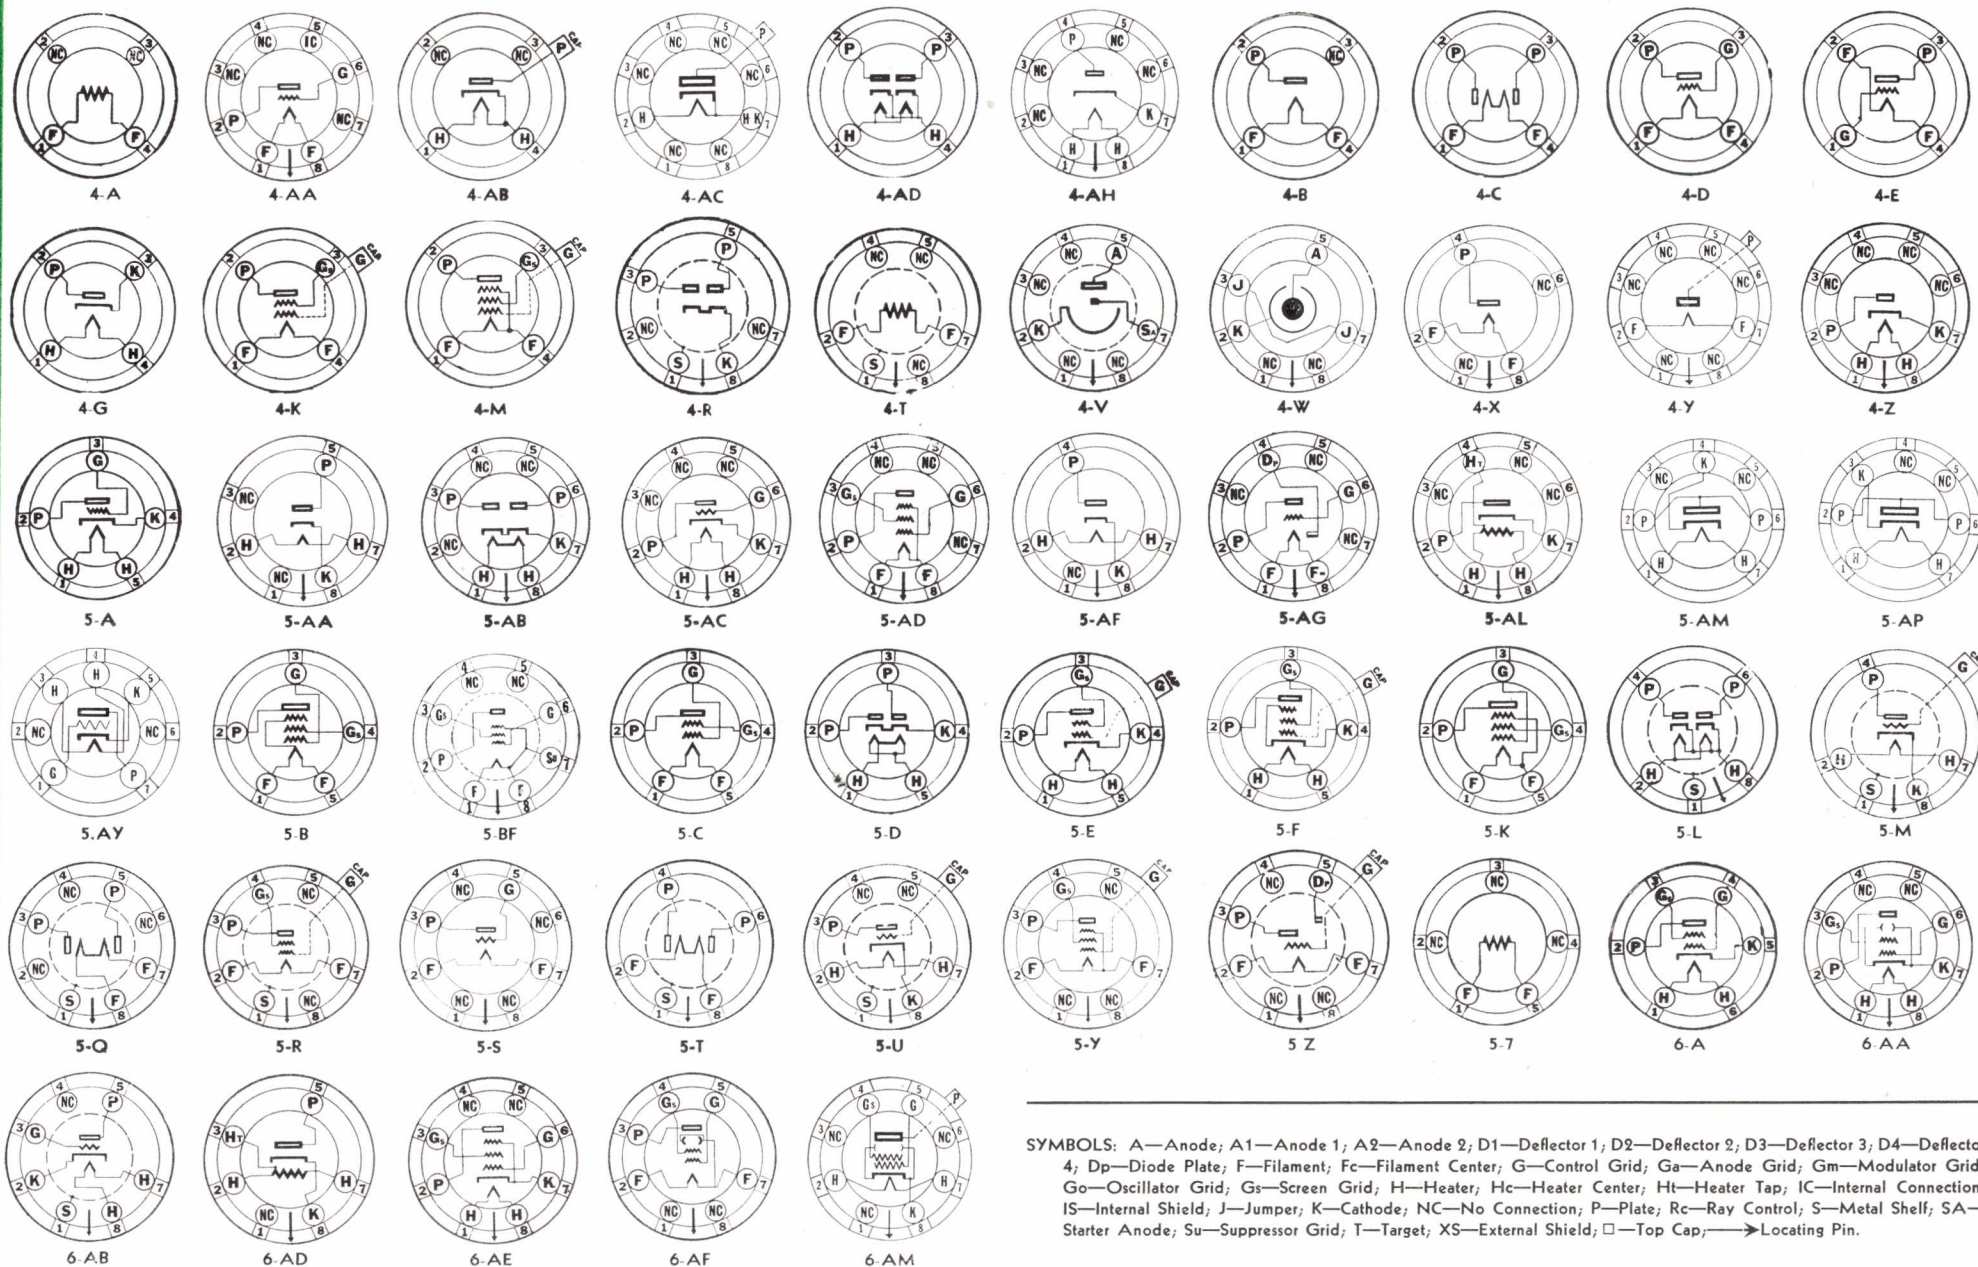


SYMBOLS: A—Anode; A1—Anode 1; A2—Anode 2; D1—Deflector 1; D2—Deflector 2; D3—Deflector 3; D4—Deflector 4; Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Control Grid; Ga—Anode Grid; Gm—Modulator Grid; Go—Oscillator Grid; Gs—Screen Grid; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection, IS—Internal Shield; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shelf; SA—Starter Anode; Su—Suppressor Grid; T—Target; XS—External Shield; □—Top Cap; —>—Locating Pin.


TUBE AND BASE DIAGRAMS (VIEWED FROM BOTTOM OF BASE—RMA NUMBERING SYSTEM—Continued)




6-AP




6-AR




6-AS




6-AU




6-AX




6-B




6-BB




6-BD




6-BE




6-BG




6-BJ




6-BT




6-C




6-D




6-E




6-F




6-G




6-H




6-J




6-K




6-L




6-M




6-Q




6-R




6-S




6-T




6-W




6-X




7-A




7-AA




7-AB




7-AC




7-AD




7-AG




7-AH




7-AJ




7-AK




7-AL




7-AM




7-AN




7-AO




7-AP




7-AT




7-AU




7-AV




7-AX




7-AZ




7-B




7-BA




7-BB




7-BC




7-BD



7-BE




7-BF




7-BT

SYMBOLS: A—Anode; A1—Anode 1; A2—Anode 2; D1—Deflector 1; D2—Deflector 2; D3—Deflector 3; D4—Deflector 4; Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Control Grid; Ga—Anode Grid; Gm—Modulator Grid; Go—Oscillator Grid; Gs—Screen Grid; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection; IS—Internal Shield; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shelf; SA—Starter Anode; Su—Suppressor Grid; T—Target; XS—External Shield; □—Top Cap; —>—Locating Pin.

TUBE AND BASE DIAGRAMS (VIEWED FROM BOTTOM OF BASE— RMA NUMBERING SYSTEM—Continued)

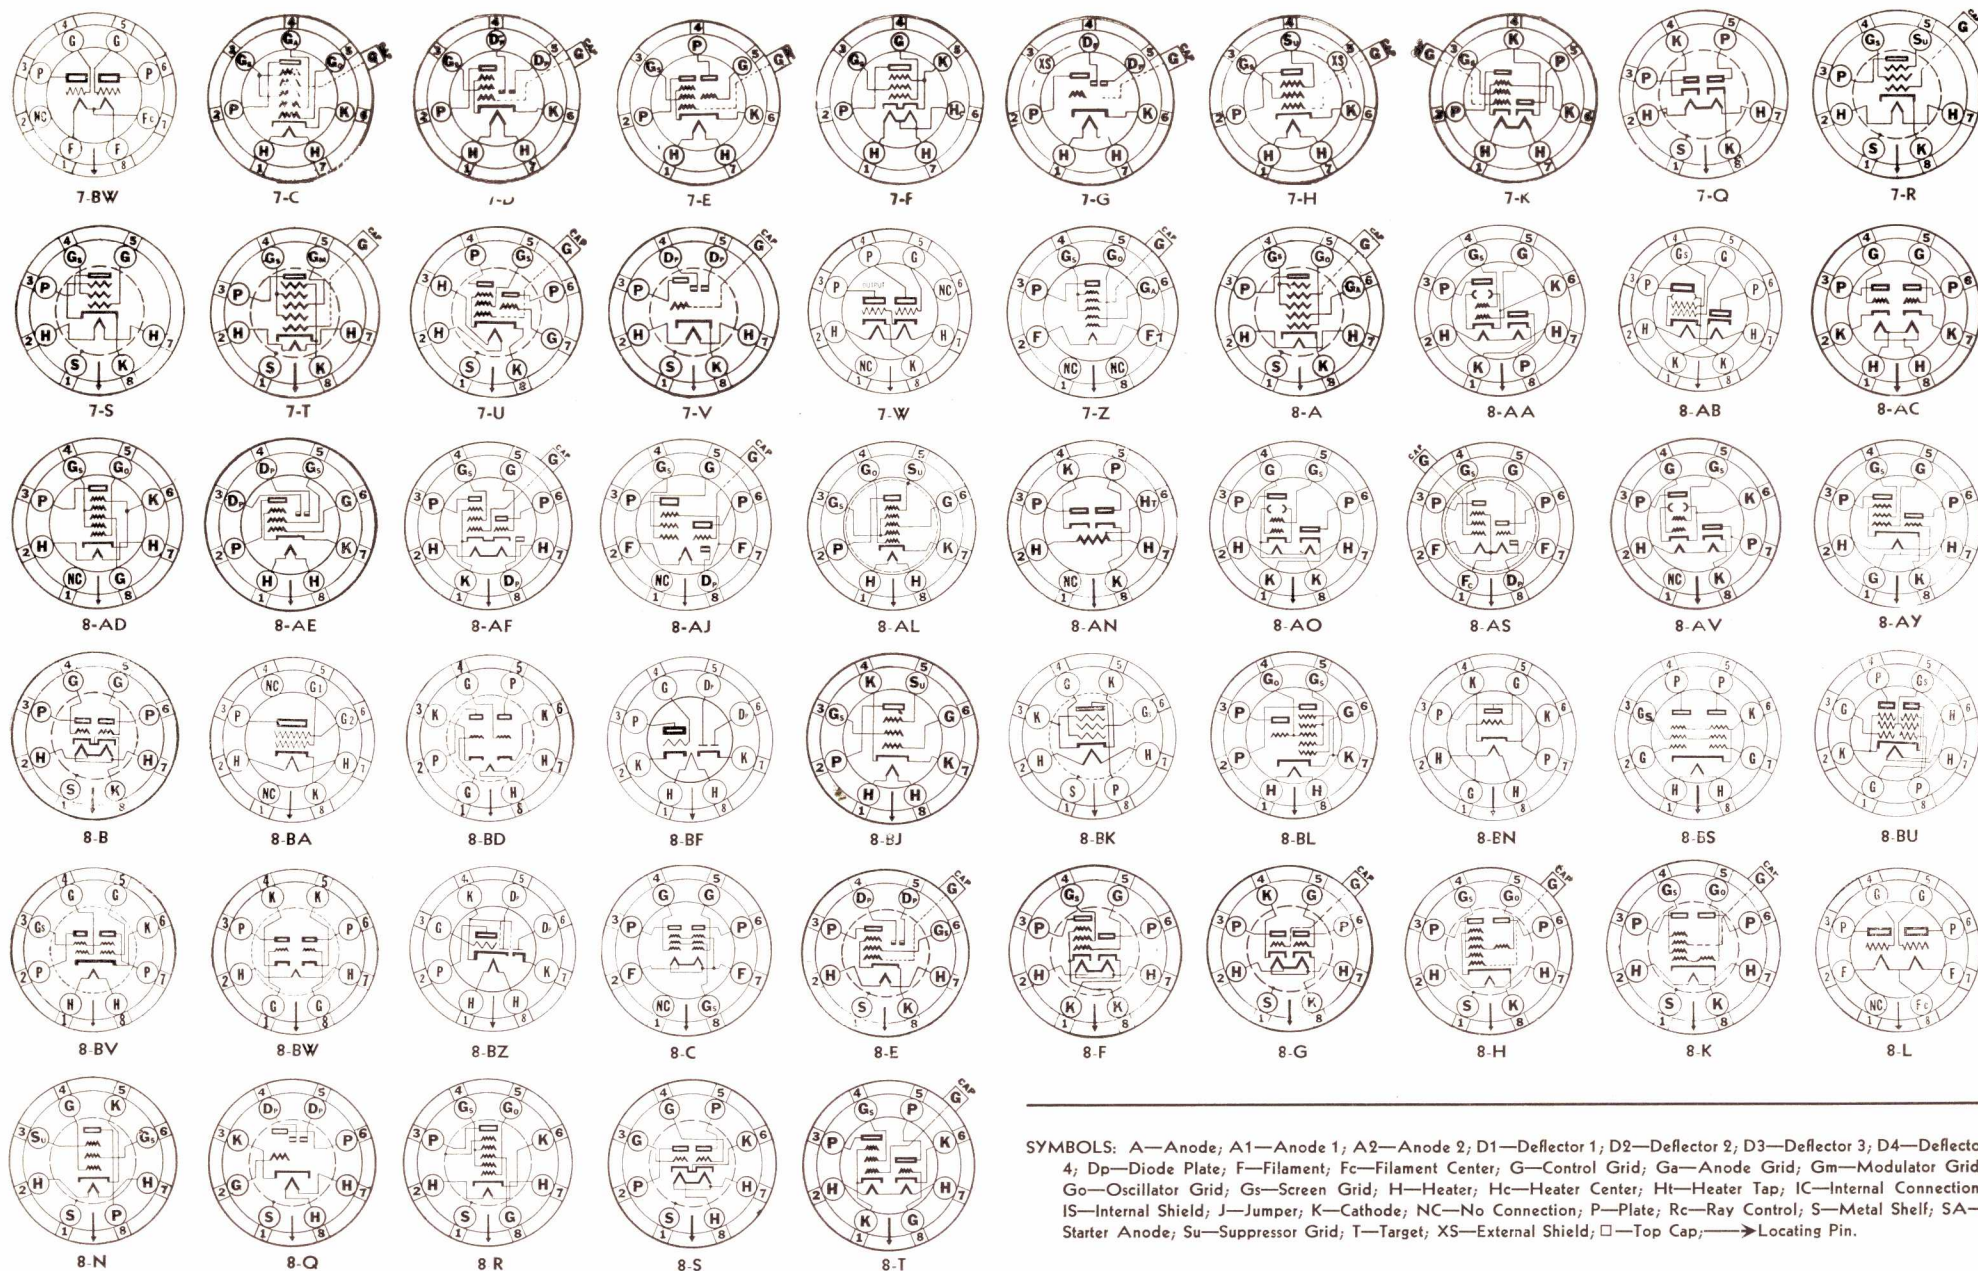

SYMBOLS: A—Anode; A1—Anode 1; A2—Anode 2; D1—Deflector 1; D2—Deflector 2; D3—Deflector 3; D4—Deflector 4; Dp—Diode Plate; F—Filament; Fc—Filament Center; G—Control Grid; Ga—Anode Grid; Gm—Modulator Grid; Go—Oscillator Grid; Gs—Screen Grid; H—Heater; Hc—Heater Center; Ht—Heater Tap; IC—Internal Connection; IS—Internal Shield; J—Jumper; K—Cathode; NC—No Connection; P—Plate; Rc—Ray Control; S—Metal Shelf; SA—Starter Anode; Su—Suppressor Grid; T—Target; XS—External Shield; □—Top Cap; →—Locating Pin.

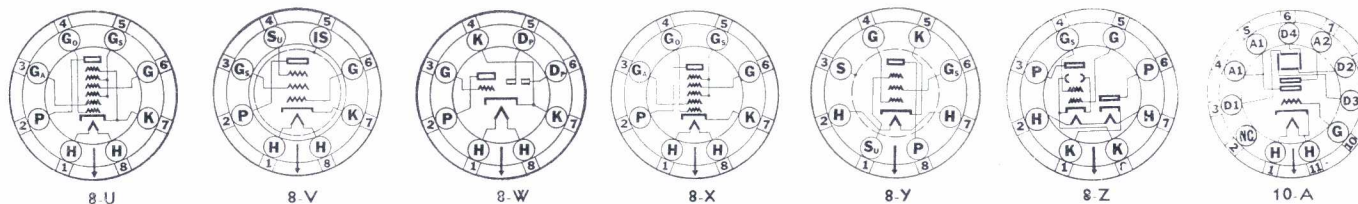

SYLVANIA PANEL LAMP CHARACTERISTICS

Type No.	Circuit Volts	Design		Bead Color	Bulb Style	Miniature Base	Usual Service	Type No.		Type No.	Circuit Volts	Design		Bead Color	Bulb Style	Miniature Base	Usual Service	Type No.
		Volts	Amp.									Volts	Amp.					
S40	6-8	6.3	0.15	Brown	T-3 $\frac{1}{4}$	Screw	Radio Dials	S40		*S49	2.0	2.0	0.06	Pink	T-3 $\frac{1}{4}$	Bayonet	Battery Set Dials	*S49
S41	2.5	2.5	0.50	White	T-3 $\frac{1}{4}$	Screw	Radio Dials	S41		S50	6-8	7.5	0.20	White	G-3 $\frac{1}{2}$	Screw	Auto Sets, Flash Lights	S50
S42	3.2	3.2	0.35	Green	T-3 $\frac{1}{4}$	Screw	Radio Dials	S42		S51	6-8	7.5	0.20	White	G-3 $\frac{1}{2}$	Bayonet	Auto Sets, Auto Panels	S51
S43	2.5	2.5	0.50	White	T-3 $\frac{1}{4}$	Bayonet	Radio Dials and Tuning Meters	S43		S55	6-8	6.5	0.40	White	G-4 $\frac{1}{2}$	Bayonet	Auto Sets, Parking Lights	S55
S44	6-8	6.3	0.25	Blue	T-3 $\frac{1}{4}$	Bayonet	Radio Dials and Tuning Meters	S44		S292	2.9	2.9	0.17	White	T-3 $\frac{1}{4}$	Screw	Radio Dials	S292
S45	3.2	3.2	0.35	White	T-3 $\frac{1}{4}$	Bayonet	Radio Dials	S45		S292A	2.9	2.9	0.17	White	T-3 $\frac{1}{4}$	Bayonet	Radio Dials Coin Machines	S292A
S46	6-8	6.3	0.25	Blue	T-3 $\frac{1}{4}$	Screw	Radio Dials and Tuning Meters	S46		S1455	18.0	18.0	0.25	Brown	G-5	Screw	Coin Machines	S1455
*S47	6-9	6.3	0.15	Brown	T-3 $\frac{1}{4}$	Bayonet	Radio Dials	*S47		S1455A	18.0	18.0	0.25	Brown	G-5	Bayonet	Coin Machines	S1455A
S48	2.0	2.0	0.06	Pink	T-3 $\frac{1}{4}$	Screw	Battery Set Dials	S48										

*Sylvania Types S47 and S49 are interchangeable with Types 40A and 49A, respectively, in other brands.

SYLVANIA Offers the Latest in TECHNICAL LITERATURE



TECHNICAL MANUAL

Essential tube data and circuit information in a convenient reference form:—

1. Fundamental properties of Vacuum Tubes.
2. General Tube and Circuit information.
3. Characteristics of Sylvania Receiving Tubes.
4. Typical Radio and Receiver and Amplifier Circuits. 35 cents



TUBE COMPLEMENT BOOK

Tube complements for practically every make and model of radio receiver. Largest compilation of i-f peaks and one of the few compilations of panel lamps available. Complete listing of trade names and manufacturers' addresses. 35 cents



RADIO CIRCUIT HINTS

Helpful information on radio circuits for ready reference. Free

RADIO EQUIPMENT HINTS


Hints on how to build and use radio testing equipment. Free

RADIO TUBE HINTS

This handy booklet, clears up tube mysteries, explains testing, etc. Free

SERVICE HINTS


Practical advice on unusual service problems. Free

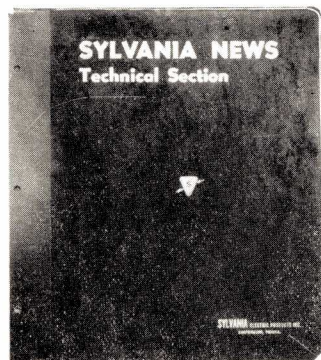

TECHNICAL SECTION BINDER

Containing all back issues of Technical Sections from May, 1935.

\$1.00

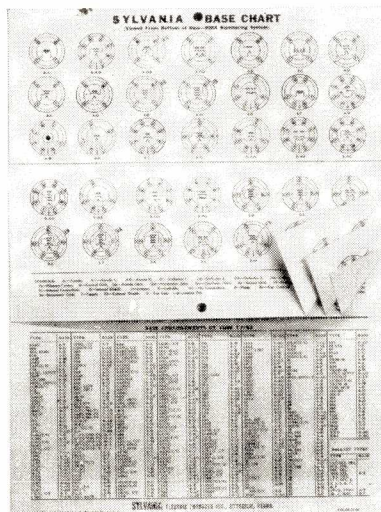

BASE CHART

Contains Base views of all Sylvania tube types with complete index and cross index for quick reference. Only chart of this type available. Very conveniently arranged for wall use.

Free

Order these Technical Helps NOW
from your Sylvania Distributor or direct. . .

SYLVANIA ELECTRIC PRODUCTS INC. - - - EMPORIUM, PENNA.

